



SEA-BIRD
SCIENTIFIC

User manual

Deep SeapHOx V2™

pH, Conductivity, Temperature, Pressure, Dissolved
Oxygen

Document No.


Deep SeapHOx
V2

Release Date:

2025-04-29

Version:

E

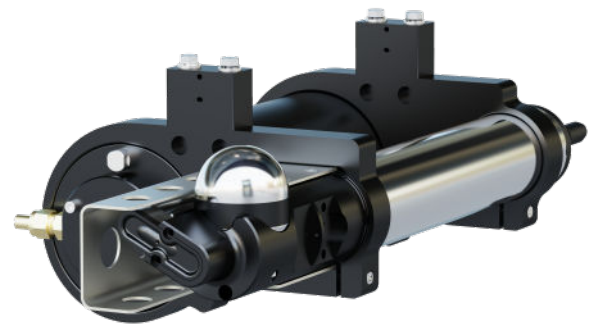

Section 1 Safety information	3
1.1 Hazard information	3
1.2 Equipment labels	4
Section 2 Deep SeapHOx™ V2 quick start guide	5
2.1 System setup	5
2.2 Transmit and process data	6
2.3 Post-deployment recovery	6
Section 3 Specifications	7
3.1 Mechanical	7
3.1.1 Deep SeapHOx V2	7
3.1.2 Bulkhead connectors	7
3.1.2.1 SBE-37-SMP-ODO connector	7
3.1.2.2 SeaFET V2 connector	7
3.1.3 Illustrations	8
3.2 Electrical	11
3.2.1 SeaFET V2	11
3.2.2 SeapHOx	11
3.3 Analytical	12
3.3.1 SeaFET	12
3.3.2 SeapHOx V2	12
Section 4 Overview	13
4.1 Ion-sensitive field effect transistor (ISFET)	13
4.2 LED status indicator and batteries	13
Section 5 Set up sensor and verify function	15
5.1 Batteries	16
5.1.1 Alkaline batteries	16
5.1.2 Install lithium batteries	16
Section 6 Deployment and recovery	19
6.1 Configure sensor with deployment wizard	20
6.2 Real-time data collection	20
6.2.1 Start data collection	20
6.2.2 Look at collected data	21
6.2.3 Save real-time data	21
6.2.4 Configure data file headers	21
6.3 Recover sensor from deployment	22
Section 7 Transmit and process data	25
7.1 Output formats	25
7.2 Export data to .csv or MS Excel format	26
7.3 Show data from the sensor	26
7.4 Erase data stored in sensor	26
Section 8 Maintenance	27
8.1 Clean electrode surfaces	27
8.2 Remove or attach mounting hardware	28
8.3 Remove and replace alkaline batteries	28
8.4 Install batteries	33
8.5 Remove or replace conductivity cell devices	35
8.6 Clean flow path	37
8.7 Examine O-rings	39
8.8 Clean bulkhead connectors	39

Table of Contents

8.9 Prepare sensor for storage	40
8.9.1 Store CTD	40
8.9.2 pH sensor storage	40
8.10 Calibration	41
8.10.1 Conductivity	41
8.10.2 Temperature	41
8.10.3 Pressure	41
8.10.4 Optical Dissolved Oxygen	42
8.10.5 Manufacturer pH calibration	42
8.10.6 Verify calibration	42
Section 9 Reference	45
9.1 Terminal program setup and use	45
9.2 Terminal commands	45
Section 10 Software reference	49
10.1 Sensor dashboards	49
10.2 UCI menu	49
10.2.1 General tab	49
10.2.2 Display tab	49
10.2.3 Message tab	50
10.3 Sensor menu	51
10.3.1 SeaFET, SeapHOx	51
10.4 Data menu	51
Section 11 General information	53
11.1 Warranty	53
11.2 Service and support	53
11.3 AF24173 anti-foulant device	53

Section 1 Safety information

Please read this entire manual before this equipment is unpacked, set up, or operated. Pay attention to all danger, warning, and caution statements. Failure to do so could result in serious injury to the operator or damage to the equipment.

DANGER

Indicates a potentially or imminently hazardous situation which, if not avoided, will result in death or serious injury.

WARNING

Indicates a potentially or imminently hazardous situation which, if not avoided, could result in death or serious injury.

CAUTION

Indicates a potentially hazardous situation that may result in minor or moderate injury.

NOTICE

Indicates a situation which, if not avoided, may cause damage to equipment. Information that requires special emphasis.

1.1 Hazard information

WARNING

This product can expose the user to chemicals with silica, crystalline (airborne particles of respirable size), which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to www.P65Warnings.ca.gov.

WARNING



If the user thinks that a sensor has water in the pressure housing: Disconnect the sensor from any power supply. Put on safety glasses and make sure that the sensor is pointed away from the body and other people. In a well ventilated area, use the purge port (if the sensor is so equipped), or very SLOWLY loosen the bulkhead connector to let the pressure release.

WARNING



If the user thinks that the batteries have leaks, pressure may have built up inside of the pressure housing. Follow ESD protocols to release internal pressure. Put on safety glasses and protective gloves and make sure that the sensor is pointed away from the body and other people. In a well ventilated area, very SLOWLY loosen the bulkhead connector to release the pressure. Keep away from heat, sparks, flame, and other sources of ignition. Do not smoke.

⚠ CAUTION



The pressure housing contains Electrostatic Discharge (ESD) sensitive parts and assemblies that are susceptible to damage from ESD. Follow ESD protocols:

- Put on protective eye wear before you open the pressure housing.
- Any electrostatic charge on the body of the human operator must be released before the pressure housing is opened: put a hand on a grounded surface, or better, wear a grounded antistatic wrist strap.
- At a minimum, wear short-sleeved antistatic clothing, such as cotton, or better, wear an antistatic smock for this service activity. *Do not wear a sweater, fleece or polyester-based clothing.*
- At a minimum, use a workstation with a wood or metal tabletop, or better, a tabletop that dissipates static. *Do not use a workstation with a synthetic or polymeric-based tabletop.*

⚠ CAUTION

AF24173 anti-fouling devices contain bis(tributyltin) oxide. Wear rubber or latex gloves and eye protection to replace these devices on the sensor if it is so equipped. Wash hands with soap and water when finished.

Read the precautions on the product label.

It is a violation of US federal law to use this product in a manner that is inconsistent with its label.

NOTICE

The manufacturer is not responsible for any damages due to misapplication of misuse of this product including, without limitation, direct, incidental and consequential damages, and disclaims such damages to the full extent permitted under applicable law. The user is solely responsible to identify critical application risks and install appropriate mechanisms to protect process during a possible equipment malfunction.

1.2 Equipment labels

Read all labels and tags attached to the equipment. Personal injury or damage to the equipment could occur if not observed. A symbol on the equipment is referenced in the manual with a precautionary statement.



Electrical equipment marked with this symbol may not be disposed of in European domestic or public disposal systems. Return old or end-of-life equipment to the manufacturer at no charge to the user.



EFUP e: No hazardous material exists over the threshold of GB/T 26572-2011 standard, China's Requirements for Concentration Limits for Certain Hazardous Substances in Electrical and Electronic Products. This product should be recycled after its environmentally friendly use period.



ATTENTION! Remove sticker before deployment!

This sticker protects your instrument during shipping. **REMOVE BEFORE DEPLOYMENT**; if it is not removed, your instrument will not operate properly and you may cause severe damage to the conductivity cell. The conductivity cell is made of glass and will break if mishandled or frozen while filled with water. Apply new sticker to protect instrument when not in use (see spares kit).

NOTICE: Sticker may have come in contact with the AF24173 Anti-foulant device, which contains TBTO. Dispose of the removed sticker. See SDS for handling precautions.

Section 2 Deep SeapHOx™ V2 quick start guide

This quick start guide gives the steps necessary to make sure that the Deep SeapHOx V2 sensor operates correctly and collects data before it is deployed. The Deep SeapHOx V2, a Deep SeaFET V2 with an SBE-37-SMP-ODO MicroCAT attached, measures the pH, and conductivity, temperature, pressure, and dissolved oxygen. The two sensors must be integrated by the manufacturer.

The Deep SeapHOx V2 acts as a controller for the SBE-37-SMP-ODO, which sends the data it collects to the Deep SeapHOx V2. Because the SBE-37-SMP-ODO pump operates before each burst of data collection, the manufacturer recommends that the shortest data collection interval is every two minutes. Use the battery endurance calculator in the software to determine the length of a deployment.

What's in the box:

- Flow cells and fittings
- CD—has software, calibration files, documentation
- SeaFET V2 toolkit and O-rings
- Dummy plug and lock collar
- Y-cable to connect the Deep SeaFET V2 and the SBE-37-SMP-ODO
- Data cable to connect the SeapHOx to a PC
- Data cable for the SBE-37-SMP-ODO only
- Mounting brackets (2) that attach the SBE-37-SMP-ODO to the Deep SeaFET V2
- Plumbing kit and Triton® X-100 to clean SBE-37-SMP-ODO flow path
- Hardware kit for boss seal.

2.1 System setup

The Deep SeaFET V2 has 12 size D alkaline batteries installed by the manufacturer. The user should verify that they are installed correctly and supply sufficient voltage for a deployment. Refer to [Remove and replace alkaline batteries](#) on page 28 for details. The 12 lithium batteries for the SBE-37-SMP-ODO are shipped separately and need to be installed by the user.

1. Install the manufacturer-supplied lithium batteries in the SBE-37-SMP-ODO (refer to [Install lithium batteries](#) on page 16 for details.)
 - a. Remove the end flange of the SBE-37.
 - b. Disconnect the battery holder and remove it from the sensor.
 - c. Install 12 new lithium AA batteries.
 - d. Connect the battery pack to the sensor again. Make sure that the Molex connectors of the battery pack and the sensor are connected correctly.
 - e. Install the end flange again.
2. Remove the yellow protective label from the SBE-37 intake and exhaust ports.
3. Connect the Deep SeaFET V2 and SBE-37-SMP-ODO with the manufacturer-supplied Y-cable.
4. Connect the Y-cable to the manufacturer-supplied test cable.
5. Install the manufacturer-supplied software on a PC (refer to [Set up sensor and verify function](#) on page 15 for details.)
6. Connect the test cable to the PC and double-click on **UCI** to start the software.
7. Push **Connect** in the software to turn on the sensor.
8. Configure the sensor for deployment (refer to [Configure sensor with deployment wizard](#) on page 20 for details.)

9. Before the Deep SeapHOx V2 is deployed, connect the plumbing to the SBE-37-SMP-ODO.
 - a. Use a 5/32" hex key to remove the three screws that attach the flow cell to the pressure housing.
 - b. Remove the two threaded plastic plugs and install the manufacturer-supplied copper flow cells to the cap.
 - c. Install the flow cell again. Make sure the fitting is securely connected to the exhaust port on the SBE-37.
10. Verify that the screw-in boss seal on the Deep SeapHOx V2 is tightened all the way.

NOTICE

Make sure that the screw-in boss seal is tightened or the sensor will flood and void the warranty.

2.2 Transmit and process data

Transmit and process data that is stored in the sensor to the PC (refer to [Transmit and process data](#) on page 25 for details).

1. Connect the sensor to the UCI software and PC and start the software.
2. Push **Transmit Data** in the [Dashboard](#) of the software.
3. Select "All Data" or "Sample Number Range" in the [Data Transmit Options](#) area.
4. Select either "UTC" or "Local" time stamp in the [CSV Format Options](#) area.
5. Enter a new file name or use the automatically generated file name.
6. Push **Transmit**.

The software copies the data to the PC in both a raw **.sbsdat** format and a converted **.csv** format.

2.3 Post-deployment recovery

1. Immediately after the Deep SeapHOx V2 is recovered from a deployment (refer to [Recover sensor from deployment](#) on page 22 for details):
 - a. Use the software to turn off the sensor.
 - b. Disconnect the fittings from the flow cell of the SBE-37-SMP-ODO and secure the two red caps to keep fresh water out of the flow cell.
 - c. Rinse both sensors with fresh water.
 - d. Disconnect the Y-cable and remove the SBE-37-SMP-ODO from the mounting bracket.
 - e. Clean the flow path of the SBE-37-SMP-ODO (refer to [Clean flow path](#) on page 37 for details).
2. Dry and lubricate the bulkhead connectors (refer to [Clean bulkhead connectors](#) on page 39 for details).
3. Attach the protective dummy plugs and lock collars.
4. Refer to [Prepare sensor for storage](#) on page 40 for details to prepare sensor for short- or long-term storage.

Section 3 Specifications


3.1 Mechanical

3.1.1 Deep SeapHOx V2


	SeaFET V2	37-SMP-ODO (titanium)
Rated depth	2000 m	7000 m
Weight in air, water	5.45 kg	4.1, 2.2 kg
Length	44.17cm	55.5 cm
Temperature range, operation	0–50 °C	-5–45 °C
Temperature range, storage	2–55 °C	2–55 °C

3.1.2 Bulkhead connectors

3.1.2.1 SBE-37-SMP-ODO connector

Contact	Function	MCBH-4-MP
1	Ground	
2	RS232 RX	
3	RS232 TX	
4	Voltage in	


3.1.2.2 SeaFET V2 connector

Contact	Function	MCBH-8-MP
1	Voltage in	
2	Ground	
3	No connect	
4	CTD/pump V out (12 V, 650 mA, optional)	
5	TXD/D+	
6	RXD/D-	
7	CTD TXD	
8	CTD RXD	

Specifications

3.1.3 Illustrations

Figure 1 Deep SeapHOx V2 dimensions

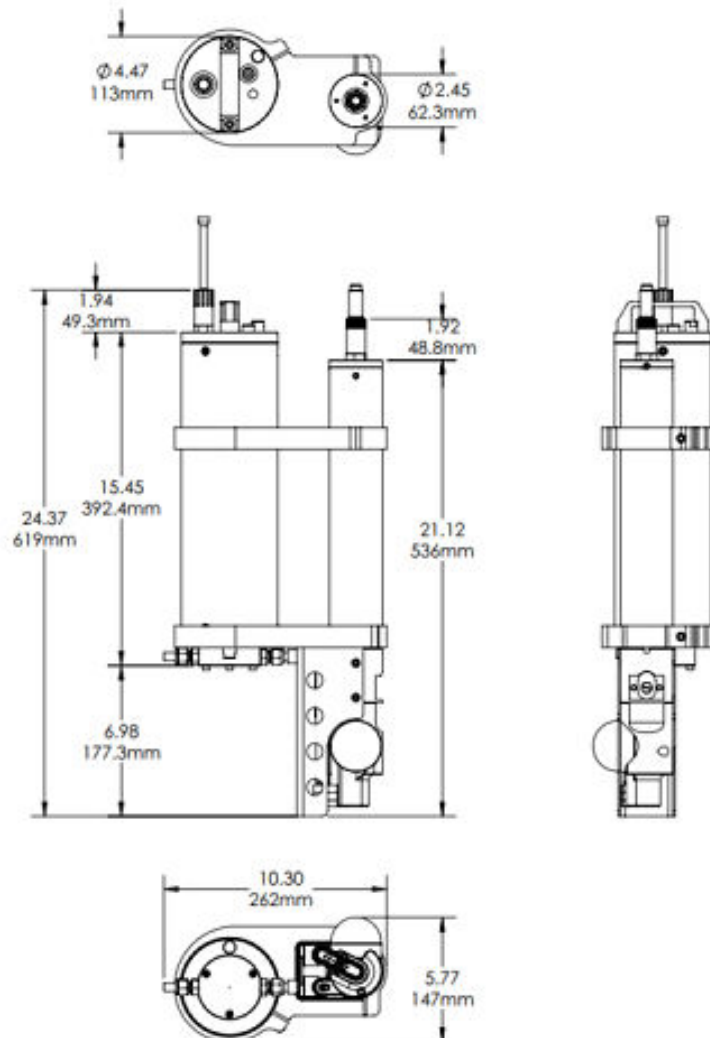

Specifications

Figure 4 Data I/O cable

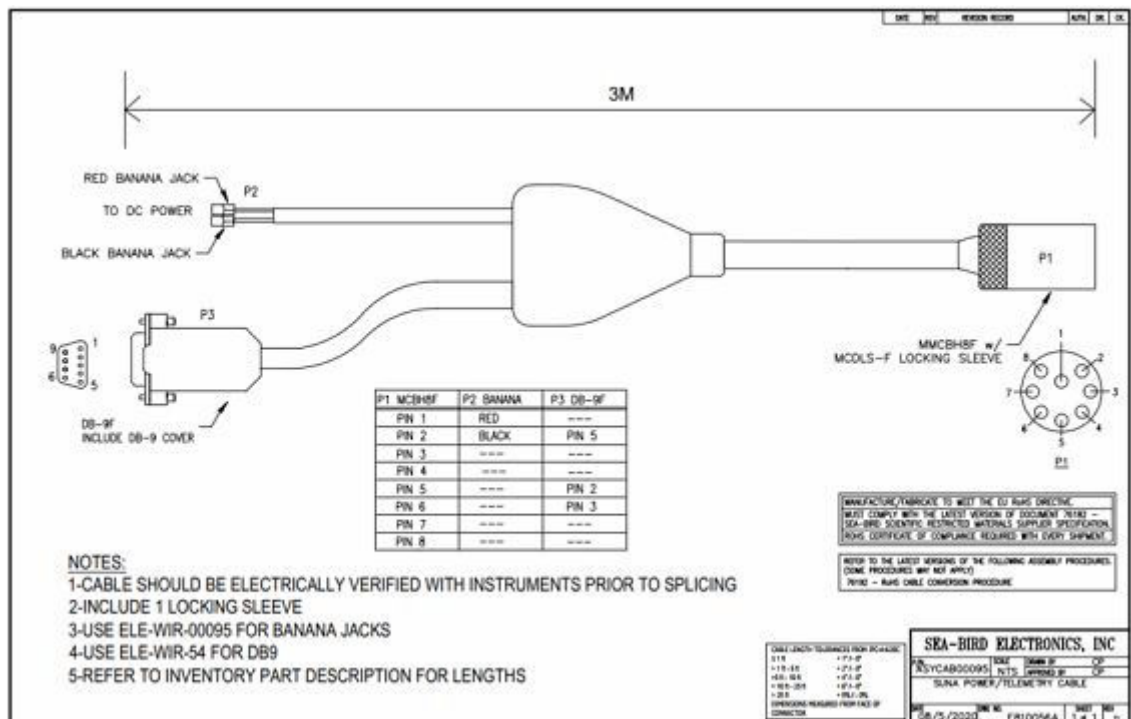


Figure 5 SBE-37 only data cable

The input/output data cable connects directly to the SBE-37 only.


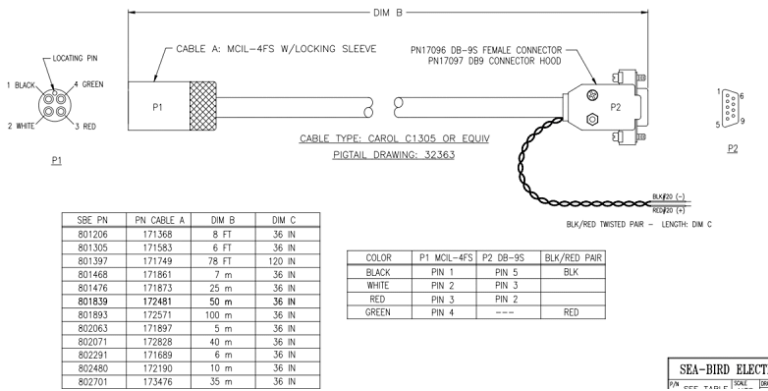


Figure 6 SeapHOx internal view

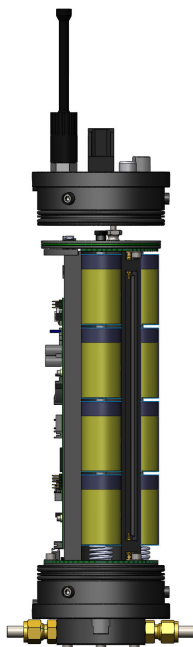

3.2 Electrical

3.2.1 SeaFET V2

Input	6–18 VDC
Internal batteries	12 D-cell 1.5 V alkaline
Communication interface	RS232: 9600–115200 baud; Default: 19200 baud
Data storage	32 Mb (over 1240000 samples)
Current draw, operation	340–400 mW
Current draw, low power	10 μ A

3.2.2 SeapHOx

Input	6–18 VDC
Internal batteries	12 D-cell 1.5 V alkaline
Main battery pack	12 V, 13420 mA-hours
Isolated battery	6 V
Current draw, operation	
CTD OFF, data transmit OFF	18.9 mA (2.5 sec sample time)
CTD OFF, data transmit ON	21.1 mA (2.6 sec sample time)
CTD ON, data transmit OFF	21.7 mA (7.2 sec sample time)
CTD ON, data transmit ON	23.1 mA (7.2 sec sample time)
Current draw, pump	10 mA
Current draw, idle	3.4–4.0 mA
Current draw, quiescent	Main battery: 70 μ A; Isolated battery: 200 μ A @ 12 V

Specifications

Real-time clock drift	2 ppm (0–40 °C)
Communication interface	RS232: 9600–115200 baud Default: 19200 baud
Data storage	32 Mb (over 1240000 samples)

3.3 Analytical

3.3.1 SeaFET

Measurement range	6.5–9.0 pH
Accuracy	±0.05 pH
Precision	0.004 pH
Resolution	0.0001 pH
Stability	0.003 pH/mo

3.3.2 SeapHOx V2

	Conductivity	Temperature	Depth	Oxygen
Measurement range	0–70 mS/cm	-5–45 °C	350 m, 7000 m	120% surface saturation
Accuracy	±0.003 mS/cm	±0.002 °C (-5–35 °C); ±0.01 °C (35–45 °C)	±0.1% full scale range	±0.1 mg/L or ±2%
Resolution	0.0001 mS/cm	0.0001 °C	0.002% full scale range	0.2 µmol/kg
Stability	0.003 mS/cm/mo	0.0002 °C/mo	0.05% full scale range/yr	sample-based drift <1 µmol/kg/100,000 samples @20 °C

Section 4 Overview

The sensor uses ion-sensitive field effect transistor (ISFET) technology to measure pH in marine environments at depths to 2000 meters. The sensor has internal memory and an internal battery pack so that it can operate autonomously for a long-term deployment.

When an SBE-37-SMP-ODO is attached to the Deep SeaFET, the system operates in Deep SeapHOx mode, which also measures salinity, temperature, depth, and oxygen, and has an internal pump. The Deep SeapHOx uses a manufacturer-attached "Y" cable to connect the Deep SeaFET and SBE-37-SMP-ODO.

The manufacturer-supplied software lets the user set up the sensor, monitor graphical data in real time, upload stored data, and process that data. During the deployment of a Deep SeapHOx, the Deep SeaFET queries the SBE-37-SMP-ODO to collect data, which is saved to the Deep SeaFET. No data is stored in the SBE-37-SMP-ODO.

The end flange cap is used with flow cells when the Deep SeaFET is connected to the SBE-37-SMP-ODO.

Figure 7 Flow cell


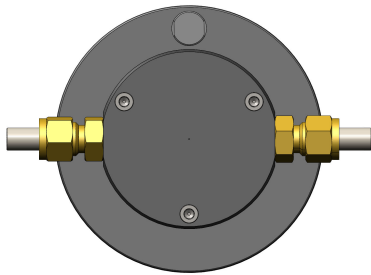


Figure 8 Flow cell with ISFET shown



4.1 Ion-sensitive field effect transistor (ISFET)

The primary sensor element of the Deep SeapHOx V2 is a special deep-packaged ISFET, a solid-state sensor that senses pH in marine environments.

External reference

The external reference electrode has a Ag/AgCl reference electrode in direct contact with seawater. The potential of this electrode varies with pH and chloride concentration, so unless the chloride concentration is known, the external reference is not stable. To correct this, salinity is used as an approximation of chloride concentration. The salinity data that is calculated by the SBE-37-SMP-ODO is applied to the pH external data and significantly reduces measurement errors, and gives the most accurate and stable pH data.

4.2 LED status indicator and batteries

The LED near the magnetic power switch shows the status of the sensor, so you can determine if the sensor is in operation or ready to be deployed. To see the status of the sensor, swipe the manufacturer-supplied magnet across the red circle at the top of the magnetic switch. If the LED does not flash, verify that new batteries are installed and the memory is configured. None of the settings on the SeaFET are affected when you use the magnet to look at the status.



Table 1 LED status flashes

No flash	Sensor batteries or memory not ready for deployment	<ul style="list-style-type: none"> RTC battery is below 2.5V Isolated battery is below 4.0V Main battery or external power supply is below 7.0V Memory is full
Red flash	Sensor has not received a command to collect data	<ul style="list-style-type: none"> The sensor is in standby for a command to begin data collection Push Start to start data collection. ("startnow" or "startlater" in a terminal program.)
Green flash	Sensor is in operation	Logger-controlled (polled) data collection occurs. The sensor has received a "Start," "startnow," or "startlater" command.

The internal batteries must be installed in the SeaFET at all times for the preservation of the sensing element. If the internal batteries are removed, the sensor must be "re-conditioned" before or at a deployment, which can take up to 24 hours.

SeaFET V2 batteries

There are 12 manufacturer-installed D-cell batteries to supply power to the sensor.

The internal batteries are electrically divided into a 12 V main battery pack and a 6 V isolated battery pack. The main battery pack supplies power to the sensor and the isolated battery pack supplies power to the sensing element when the sensor is in a low power "standby" mode.

SeapHOx: SBE-37-SMP-ODO integrated with SeaFET V2

SBE-37-SMP-ODO batteries

The SBE-37-SMP-ODO attached to the SeaFET uses lithium batteries that ship separately and must be installed before use if the SeaFET is not set up to supply power to the SBE-37-SMP-ODO.

Power options during deployment

Power can be supplied to the SeapHOx from either the SeaFET internal batteries or an external power source. The sensor will use an external source when the voltage is at or above 9 volts. The user can configure the SeaFET to supply power to the SBE-37-SMP-ODO. For maximum lifetime of the SeaFET batteries, install new lithium batteries in the SBE-37-SMP-ODO and configure the SeapHOx without a power supply to the SBE-37-SMP-ODO.

Section 5 Set up sensor and verify function

NOTICE

Make sure that the SeapHOx is submerged in water before operation to prevent damage to the pump. The pump always operates when the SeapHOx takes a measurement. Before a deployment, set the start time to occur after the sensor is submerged. The SeapHOx does not use a minimum conductivity value for the pump to operate.

Do the steps below to make sure the sensor operates correctly before further setup and deployment. Use the manufacturer-supplied UCI software to set up and configure the sensor and to transmit data.

1. Connect the sensor to the PC and a regulated power supply set at 12 V.
 - SeaFET standalone: connect the data I/O cable to the PC.
 - SeapHOx: Make sure that the Y-cable is installed and connects the SeaFET and the SBE-37-SMP-ODO. Connect the I/O cable to the Y-cable and the PC.
2. Get the software from the manufacturer's website or the manufacturer-supplied USB drive or CD.
3. Install the appropriate software.
 - a. For Windows®: Double-click on the file with ".exe" appended to the name.
 - b. For Mac OS X®: Double-click on the file with ".pkg" appended to the name. Make sure that the default "Install for all users on this computer" is selected as the destination for the installed software. If "Install for me only" or "Install on a specific disk" is selected, the software will not connect to the sensor.
4. Push **Run** in the new window.
The setup wizard starts.
5. Follow the on-screen instructions to install the software.
6. Push **Connect** in the Dashboard area or at the top of the UCI window.
7. If necessary, change the "Instrument Type" to the connected sensor.
8. Put a check in the "Try All Baud Rates" box.
The software automatically finds the correct baud rate.
9. If it is necessary to select the directory in which to store collected data, go to the **UCI** menu, then *Preferences*.
10. Go to the *General* tab and push **Browse** to find or make the *Default Data Directory* on the PC.
Data from the sensor is saved here.
11. Push **OK**.
12. Push **Apply** to store the settings in the sensor.
13. Push **Start** in the Dashboard area or use the icon under the UCI menu options.



The sensor operates and collects data.

14. Look at the data in the *Time Series* graph. The user can look at data in real-time for each sensor that has power supplied, is connected and is in communication with the software.
 - Put a check in the box next to "Time Axis" to push **Zoom In** and **Zoom Out** to change the scale of time.
 - Put a check in the box next to "Range Axis" to push **Zoom In** and **Zoom Out** to change the scale of the data.
 - To move the data in any direction, push the "Ctrl" key on the PC keyboard and the left button of the mouse pointer at the same time.

Set up sensor and verify function

- To select a specific part of the data to zoom in on, pull the mouse pointer diagonally.
- Push **Auto Range** to see the data for each selected parameter. The software adjusts the scale so that the data will always show.
- Push **Default Ranges** to go back to the manufacturer-set default scale for each parameter.
- Put a check in the box next to "Show Data Points" to see the value of the collected data when the mouse moves over each point.
- Push **Select Sensors To Display** to change the parameters to look at in the *Time Series* graph.

15. Push **Stop**. The "Connection Mode" shows "Setup."

5.1 Batteries

5.1.1 Alkaline batteries

Twelve D-cell alkaline batteries are installed in the SeaFET by the manufacturer. The user should verify that the batteries are installed correctly and supply the specified voltage. Refer to [Remove and replace alkaline batteries](#) on page 28 for details about how to change the batteries when necessary.

5.1.2 Install lithium batteries

NOTICE


Use only the batteries recommended by the manufacturer as replacements. Do not mix chemistries, V-Ah, or new and used batteries.

The manufacturer ships the twelve lithium batteries for the SBE-37-SMP-ODO separately. Do the steps below to install or replace the batteries. See also the "how to" video on the manufacturer's website to do this procedure.

Table 2 Recommended lithium battery brands

SAFT LS-14500 (included)	3.6 V, 2.6 Ah
Tadiran TL-4903	3.6 V, 2.4 Ah
Electrochem BCX85 series	3.9 V, 2.0 Ah

1. Make sure that the end flange and pressure housing are dry.
2. Use a 9/64" hex key to remove the two screws on the sides of the pressure housing.
3. Install these two screws into the sides of the end flange to start to loosen the end flange.
4. Turn the end flange counter-clockwise to loosen it from the pressure housing.

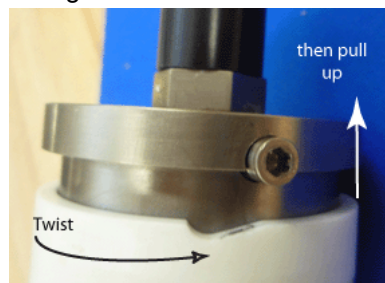


5. Pull gently to disconnect the battery wires in the end flange from the battery pack.
6. Use a lint-free tissue to remove any water from the O-ring surfaces inside the pressure housing and end flange.
7. Use a 7/64" hex key to loosen the captured screw in the battery cover plate.



8. Remove the battery pack from the pressure housing.
9. Turn the yellow cover plate counterclockwise to remove it from the battery pack body.
10. Move each of the two O-rings on the outside of the battery holder from the grooves. It makes it easier to remove or insert batteries.



11. Examine the O-rings and surfaces for dirt, cuts, or other damage. Clean or replace as necessary.
12. If necessary, remove the batteries in the pack.
13. Insert new batteries. Make sure to alternate the positive (+) and the negative (-) ends on the batteries to agree with the labels on the pack as they are installed.
14. Move the O-rings back into the grooves.
15. Align the pin on the yellow battery cover with the post hole in the battery pack assembly.

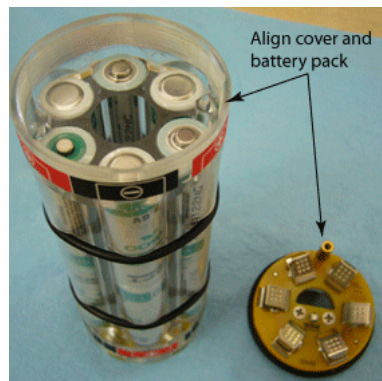

16. Align the "D"-shaped part of the battery pack with the pins on the shaft.
17. Slowly move the assembly onto the housing. Push gently to connect the battery assembly with the circuit board in the pressure housing.
18. Use a 7/64" hex key to tighten the captured screw on the yellow battery cover onto the shaft in the pressure housing.
19. **Important!** Remember to attach the Molex connector on the end flange to the connector on the top of the guide pylon in the pressure housing.

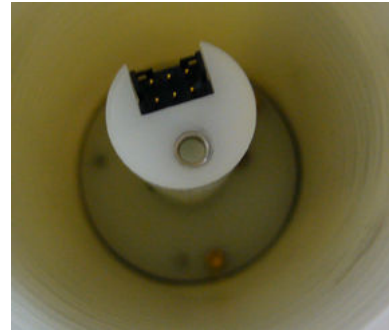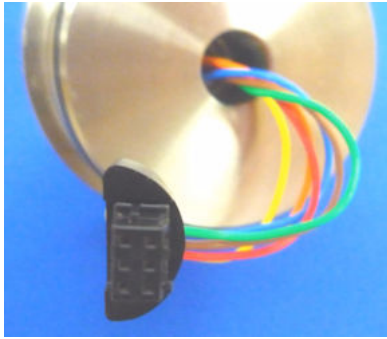

20. Examine the O-rings on the end flange. They must be pristine, with no lint or scratches or chips.
 - Apply a small quantity of Parker Super O Lube® to any new O-rings.
21. Align the end flange holes with the holes in the pressure housing.
22. Carefully push the end flange into the pressure housing.
It may help to rotate the end flange so that the wires do not bend too much.
23. If necessary, use a 9/64" hex key to remove the two screws from the end flange.
24. Use a 9/64" hex key to install the two screws into the pressure housing of the sensor again.

Section 6 Deployment and recovery

NOTICE

Make sure that the screw-in boss seal is tightened or the sensor will flood and void the warranty.



NOTICE

Make sure that the SeapHOx is submerged in water before operation to prevent damage to the pump. The pump always operates when the SeapHOx takes a measurement. Before a deployment, set the start time to occur after the sensor is submerged. The SeapHOx does not use a minimum conductivity value for the pump to operate.

The SBE-37-SMP-ODO has an internal pump that operates for one second each time the sensor collects a sample. The internal pump has several advantages over sensors without pumps:

- The pump flushes the water from the flow path after each sample and quickly moves a new sample into the flow path so that conductivity and oxygen measurements are more accurate.
- Water does not flow freely through the flow path so it stays saturated with the anti-fouling chemicals.
- The optical DO sensor is integrated in the flow path for better correlation with the CTD measurement.

Operate the sensor in one of several modes:

Autonomous operation

- Operates at user-selected intervals (40–21600 seconds).
- Transmits data in engineering units.
- Operation sequence:
 1. The pump operates
 2. The sensor makes one measurement
 3. The pump stops
 4. The data is stored internally in the Deep SeapHOx
 5. The sensor goes into a low power mode until the next sample is collected.

Polled operation

- Polled data collection is useful when the sensor is integrated with satellite, radio, or wire telemetry equipment.
- Operation sequence:
 1. The pump operates on command
 2. The sensor makes one measurement

3. The pump stops
4. The sensor sends the data to the controller
5. The sensor goes into a low power mode until the next command to operate.

6.1 Configure sensor with deployment wizard

The deployment wizard in the UCI software makes it easy to set up and configure the sensor for a specific deployment.

With the sensor connected to a power supply (or internal batteries if so equipped) and a PC that has the UCI software installed, start the software, turn on the power supply, start communication with the sensor and push **Deployment Wizard** in the [Dashboard](#).

Autonomous operation mode

1. Push **Synchronize SeaFET clock to computer**. The sensor and the PC show the same time. Put a check in the box to erase all of the data stored in the sensor and set the event counter to 0 when the deployment starts.
2. Set the date and time for the sensor to start data collection.
3. [Transmission](#): put a check in the box to send collected data in real time to a connected controller. Data is still stored in the sensor if this box does not have a check in it.
4. **Pump Settings**: put a check in the box to enable operation of an external pump. Values can be between 0–255. If set to 0, the pump will operate continuously.
5. Calculate **Battery Endurance**. This calculation uses an estimate of the voltage of new batteries. It does not measure voltage directly.
 - a. Enter the temperature of the water in which the sensor will be deployed.
 - b. Enter the sample interval (40–21600).
6. Make a deployment report to see sensor statistics, calibration values, and settings.

Polled (controlled) operation mode

1. Push **Synchronize SeaFET clock to computer**. The sensor and the PC show the same time. Put a check in the box to erase all of the data stored in the sensor and set the event counter to 0 when the deployment starts.
2. [Current Output Format](#) shows the order of the data values from the sensor.
3. Calculate **Battery Endurance**. This calculation uses an estimate of the voltage of new batteries. It does not measure voltage directly.
 - a. Enter the temperature of the water in which the sensor will be deployed.
 - b. Enter the polled interval (1–86400).
4. Make a deployment report to see sensor statistics, calibration values, and settings.

6.2 Real-time data collection

Real-time data collection is only possible when the sensor is configured to output data with every sample collected. Go to **Sensor**, *SeaFET*, *SeaFET Settings* to change this setting to transmit data in real-time under the *Data* tab.

6.2.1 Start data collection

1. Make sure that the sensor has power supplied and is connected to the software.
2. Make sure that there is a check in the box at "Transmit Data in Real Time."
3. Make sure that the "Output Format" is as selected.
4. Push **Start**.

6.2.2 Look at collected data

The user can monitor data in the *Real Time Data* or the *Time Series* graph. Information about the data, such as error statistics, shows in the *Acquisition Monitor*, and the collected data is saved to a file on the sensor.

1. The *Real Time* display is continuously updated to show the most recent data collected by the sensor.
2. Look at the data in the *Time Series* graph. The user can look at data in real-time for each sensor that has power supplied, is connected and is in communication with the software.
 - Put a check in the box next to "Time Axis" to push **Zoom In** and **Zoom Out** to change the scale of time.
 - Put a check in the box next to "Range Axis" to push **Zoom In** and **Zoom Out** to change the scale of the data.
 - To move the data in any direction, push the "Ctrl" key on the PC keyboard and the left button of the mouse pointer at the same time.
 - To select a specific part of the data to zoom in on, pull the mouse pointer diagonally.
 - Push **Auto Range** to see the data for each selected parameter. The software adjusts the scale so that the data will always show.
 - Push **Default Ranges** to go back to the manufacturer-set default scale for each parameter.
 - Put a check in the box next to "Show Data Points" to see the value of the collected data when the mouse moves over each point.
 - Push **Select Sensors To Display** to change the parameters to look at in the *Time Series* graph.
3. Select the **View** menu, then *Acquisition Monitor* (or push **Error Details** on the *Real Time Data* window. Use this window to see when and why there are errors in the data.

6.2.3 Save real-time data

The sensor has sufficient internal memory to save months of data.

1. Make sure that the sensor is connected to the software.
2. Push **Start**.
3. From the main menu, select **View**, then *Data Collection*.
4. Push **Start**.
The PC starts to save the data collected by the sensor.
 - To enable "Auto Save Duration," put a check in the box and specify a time to stop the data from being saved.
 - To enable "Repeat Auto Save after Interval," put a check in the box and specify a time interval after which the data will be saved.
5. To stop data from being saved to the PC, push **Stop**.


6.2.4 Configure data file headers


The user can add custom headers to data files in addition to the default OPERATOR, EXPERIMENT, and COMMENT static headers.



1. Select the **Sensor** menu, then *Advanced*, then *Data File Header*.
2. Push **Add**.
3. Double-click the HEADER_ID row to enter a custom header.
4. Push **OK**.

5. To remove a custom header, select the row to remove and push **Remove**.
6. Put a check in the "Prompt" box so that the software will ask for input of the header record values whenever data collection is started.

6.3 Recover sensor from deployment

⚠ WARNING	
	If the user thinks that a sensor has water in the pressure housing: Disconnect the sensor from any power supply. Put on safety glasses and make sure that the sensor is pointed away from the body and other people. In a well ventilated area, use the purge port (if the sensor is so equipped), or very SLOWLY loosen the bulkhead connector to let the pressure release.

⚠ WARNING	
	If the user thinks that the batteries have leaks, pressure may have built up inside of the pressure housing. Follow ESD protocols to release internal pressure. Put on safety glasses and protective gloves and make sure that the sensor is pointed away from the body and other people. In a well ventilated area, very SLOWLY loosen the bulkhead connector to release the pressure. Keep away from heat, sparks, flame, and other sources of ignition. Do not smoke.

⚠ CAUTION	
 	<p>The pressure housing contains Electrostatic Discharge (ESD) sensitive parts and assemblies that are susceptible to damage from ESD. Follow ESD protocols:</p> <ul style="list-style-type: none">• Put on protective eye wear before you open the pressure housing.• Any electrostatic charge on the body of the human operator must be released before the pressure housing is opened: put a hand on a grounded surface, or better, wear a grounded antistatic wrist strap.• At a minimum, wear short-sleeved antistatic clothing, such as cotton, or better, wear an antistatic smock for this service activity. <i>Do not wear a sweater, fleece or polyester-based clothing.</i>• At a minimum, use a workstation with a wood or metal tabletop, or better, a tabletop that dissipates static. <i>Do not use a workstation with a synthetic or polymeric-based tabletop.</i>

NOTICE
Do not let the sensing elements get dry. If the sensor will not be deployed immediately, put the wet cap in place and fill with clean seawater.

NOTICE
Do not leave the sensor in direct sun. Heat over 35 °C can cause damage to the sensor.

NOTICE
Do not let the potassium chloride (KCl) gel or the wet cap filling solution freeze. This will damage the DuraFET and void the warranty.

When the sensor is removed from the water after a deployment:

1. Use the software to turn off the sensor.
2. Disconnect the deployment Y-cable.
3. Flush the bulkhead connector, end flanges, and pressure housing with fresh water.
4. Completely dry the bulkhead connectors, then attach the dummy plugs and lock collars.

5. Before you put the Deep SeapHOx into storage, make sure it is clean. Refer to [Clean electrode surfaces](#) on page 27 for details.
6. Keep the sensor in a cool, dry place (2–35 °C) until the next deployment.

Section 7 Transmit and process data

Data that is collected and stored by sensors must be transmitted to a PC to be processed into a human-readable format. The data in an .sbsdat file is binary. When you use the software to transmit the data, it is converted to a human-readable comma-separated value (.csv) file.

1. Push **Transmit Data** in the [Dashboard](#) area.
The **Transmit Data** window shows.
 - Information in the [Memory Summary](#) lets the user see the available data storage in the sensor.
 - "Bytes" is the amount of memory in use.
 - "Samples" is the number of samples the sensor has collected and stored.
 - "Free Samples" is the number of samples the sensor can store.
 - "Sample Length" is sensor-specific and shows the length of each data record that the sensor stores.
2. In the "Transmit Type" drop-down menu in the [Data Transmit Options](#) area, select either "All Data" or "Block size (bytes)."
 - "All Data": all data stored in the sensor is transmitted to the PC in both .csv and .sbsdat file types.
 - "Sample Number Range": a user-specified range of samples. Select the specific samples in the [Sample Number Range](#) area.
3. In the [Data Transmit](#) area, the software automatically selects the fastest baud rate to use to transmit data, which is typically 115200.
The software temporarily increases the sensor's baud rate to upload data more quickly. After the transmission is complete, the software changes the baud rate to the default for the connected sensor.
4. In the [CSV Format Options](#) area, specify either the "UTC" or "Local" time stamp.
5. In the [Output CSV Data File](#) area, type a new file name or use the automatically generated file name.
6. Push **Transmit**.
 - The data is transmitted to the PC.
 - The software transmits a raw .sbsdat file and automatically converts the data to a readable .csv file type.
 - The **Transmit Progress** window shows the status of the file transmission and conversion.
 - The default is a check in the boxes for "Show Data when Conversion Completed" and "Close this Dialog when Conversion Completed."

7.1 Output formats

Default output format

OutputFormat=1 is data in decimal format, converted to engineering units.

Order in which the parameters show in the output:

FrameSync, timestamp, sample number, data error flag, temperature, pH external, Vrs_ext, pressure, salinity, conductivity, oxygen, internal relative humidity, internal temperature

Example output:

```
SSPHOX00281, 2018-05-01T07:50:23, 10, 0000, 23.1361, 4.9494,
23.1114, 0.074, 0.1646, 0.03289, 5.741, 42.3, 23.6
```

Output format used by manufacturer

OutputFormat=0 is raw data in decimal format.

Order in which the parameters show in the output:

FrameSync, timestamp, data error flag, temperature, Vrs_ext, pH temperature, Vk, Ib, Ik, pressure, pressure temperature, conductivity, oxygen phase, oxygen temperature, internal relative humidity, internal temperature

Example output:

DSPHOX00113,2020-08-12T11:48:23, 0000, 474165, 5136915, 5085728, 8378529, 8383169, 525146, 1205, 5759.352, 19.285, 1.013468, 21472, 19648

7.2 Export data to .csv or MS Excel format

Data from the sensor can be saved to either a comma-separated (.csv) file or a Microsoft® Excel file with a local or UTC time stamp. Use the software to transmit data from the sensor and then export that data to a human-readable format.

1. From the **Data** menu, select *Export Stored Data*.
2. Push **Browse** to find the file to export.
3. Select the file from the list.
4. Push **Open**.
5. Push **Next**. The current output format shows (all sensors but SUNA).
6. Push **Next**. Select the options for the file to export:
 - a. Select either "Excel Workbook" or "Comma Separated Values" in Export File Format.
 - b. Select either the "UTC" or "Local" time stamp in Format Options.
7. Push **Browse** to select the directory in which the exported data will be saved.
8. Push **Finish**.

7.3 Show data from the sensor

1. Go to the **Data** menu and select the applicable sensor.
2. Push **Show Data from Sensor**.
3. Select the data file to look at.
4. Push **Open**. The data shows in the *Time Series* graph.

7.4 Erase data stored in sensor

Sensors will append data as it is collected. If the memory is full, new data is saved over the oldest data and will continue to do that until the memory is erased. This operation erases all data stored in the sensor. It is not possible to select which data to erase.

1. Select the **Sensor** menu item.
2. Select the connected sensor.
3. Select *Advanced*.
4. Select *Erase Data*.
5. Push **OK**.
6. Push **OK** when the status in *Clear Data Progress* is 100%.

Section 8 Maintenance

⚠ WARNING



If the user thinks that a sensor has water in the pressure housing: Disconnect the sensor from any power supply. Put on safety glasses and make sure that the sensor is pointed away from the body and other people. In a well ventilated area, use the purge port (if the sensor is so equipped), or very SLOWLY loosen the bulkhead connector to let the pressure release.

⚠ WARNING



If the user thinks that the batteries have leaks, pressure may have built up inside of the pressure housing. Follow ESD protocols to release internal pressure. Put on safety glasses and protective gloves and make sure that the sensor is pointed away from the body and other people. In a well ventilated area, very SLOWLY loosen the bulkhead connector to release the pressure. Keep away from heat, sparks, flame, and other sources of ignition. Do not smoke.

⚠ CAUTION



The pressure housing contains Electrostatic Discharge (ESD) sensitive parts and assemblies that are susceptible to damage from ESD. Follow ESD protocols:

- Put on protective eye wear before you open the pressure housing.
- Any electrostatic charge on the body of the human operator must be released before the pressure housing is opened: put a hand on a grounded surface, or better, wear a grounded antistatic wrist strap.
- At a minimum, wear short-sleeved antistatic clothing, such as cotton, or better, wear an antistatic smock for this service activity. *Do not wear a sweater, fleece or polyester-based clothing.*
- At a minimum, use a workstation with a wood or metal tabletop, or better, a tabletop that dissipates static. *Do not use a workstation with a synthetic or polymeric-based tabletop.*

NOTICE

Do not leave the sensor in direct sun. Heat over 35 °C can cause damage to the sensor.

NOTICE

Use only the batteries recommended by the manufacturer as replacements. Do not mix chemistries, V-Ah, or new and used batteries.

8.1 Clean electrode surfaces


Clean the electrode surfaces after a deployment and before the sensor is put in storage.

1. Remove the cap or anti-fouling guard that is attached to the sensor.
2. Flush the electrodes with warm tap water, clean seawater, or high-purity isopropyl alcohol (90% or higher) to remove particulates.
3. Use a lint-free swab and tissue to carefully scrub away any fouling. Make sure you do not scratch the face of the ISFET chip.
4. Clean around the base of the external reference.
5. Use a lint-free tissue to carefully dry the area.
6. To remove other types of fouling:
 - Oily deposits: use a household cleaner such as Joy® or Windex® or a laboratory soap such as Sparkleen® or Detergent 8®.
 - Mineral deposits: use diluted hydrochloric acid.

7. Rinse thoroughly with clean seawater or tap water.
8. Use lint-free wipes or cotton swabs to gently dry the electrode.



8.2 Remove or attach mounting hardware

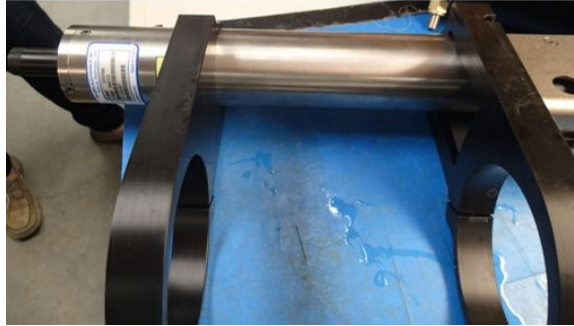When an SBE-37-SMP-ODO is attached to a SeaFET it operates as a SeapHOx. There are two brackets that secure the SeaFET and the SBE-37-SMP-ODO together so that they can operate as a SeapHOx. If it is necessary to remove them, do the steps below.



1. Put the sensors on a table to remove or attach the mounting brackets.
2. Use a 3/16" hex key to loosen the screws on each bracket that secure the SeaFET.
3. Use a 5/32" hex key to remove the three screws that secure the flow cells.
4. Remove the flow cells.
5. Carefully move the SeaFET out of the brackets.
Make sure not to scratch the housing.
6. If it is necessary to move the bracket on the SBE-37-SMP-ODO to clean the conductivity cell, use a 3/16" hex key to loosen the screws on each bracket that secure the sensor.
7. Slide the bracket out of the way.
8. To install the sensors in the brackets again:
 - a. Move the brackets onto each sensor in the positions shown above.
 - b. Use a 3/16" hex key to tighten each screw.
 - c. Remove the two red plugs.
 - d. Attach the flow cells and attach the cap again with the 5/32" screws.

8.3 Remove and replace alkaline batteries

⚠ WARNING	
	If the user thinks that a sensor has water in the pressure housing: Disconnect the sensor from any power supply. Put on safety glasses and make sure that the sensor is pointed away from the body and other people. In a well ventilated area, use the purge port (if the sensor is so equipped), or very SLOWLY loosen the bulkhead connector to let the pressure release.
⚠ WARNING	
	If the user thinks that the batteries have leaks, pressure may have built up inside of the pressure housing. Follow ESD protocols to release internal pressure. Put on safety glasses and protective gloves and make sure that the sensor is pointed away from the body and other people. In a well ventilated area, very SLOWLY loosen the bulkhead connector to release the pressure. Keep away from heat, sparks, flame, and other sources of ignition. Do not smoke.

⚠ CAUTION

The pressure housing contains Electrostatic Discharge (ESD) sensitive parts and assemblies that are susceptible to damage from ESD. Follow ESD protocols:

- Put on protective eye wear before you open the pressure housing.
- Any electrostatic charge on the body of the human operator must be released before the pressure housing is opened: put a hand on a grounded surface, or better, wear a grounded antistatic wrist strap.
- At a minimum, wear short-sleeved antistatic clothing, such as cotton, or better, wear an antistatic smock for this service activity. *Do not wear a sweater, fleece or polyester-based clothing.*
- At a minimum, use a workstation with a wood or metal tabletop, or better, a tabletop that dissipates static. *Do not use a workstation with a synthetic or polymeric-based tabletop.*

Replace the batteries in the SeaFET when necessary. Use the sensor *Dashboard* in the software or use the magnetic switch to make sure that the batteries have sufficient power for a deployment. Refer to [Install lithium batteries](#) on page 16 for details about batteries in the SBE-37-SMP-ODO.

Table 3 Required tools and supplies

8/32" thumb screw	flat head screwdriver
5/32" hex wrench	2 new desiccant packs or sealable plastic bag to store the packs removed from the sensor
1/4" socket driver	12 new alkaline D-cell batteries

1. Make sure that the flow cell is attached to the sensing elements.
2. Loosen the boss seal screw.
3. Use a 5/32" hex wrench to remove the three 10-31 x 3/8" screws from the end flange.
4. Insert a flat head screwdriver into the slot between the pressure housing and the end flange.



5. Loosen the end flange with the screwdriver until the end flange can be pulled from the pressure housing with one hand.
A safety line attaches the end flange to the battery plate to keep the battery connector wires attached.



6. Press the locking tab on the white end flange connector to disconnect and gently pull it out.
7. Remove the desiccant packs and put them in a sealed bag.
8. Remove the two 1/4" nuts that hold the battery plate:



- When batteries are installed, the battery plate compresses six springs that hold the batteries. Make sure to loosen the nuts equally—loosen one a few turns, then the other—so that the battery plate does not lock.



9. Remove the batteries.
10. Follow the polarity labels and install new batteries.



- Change all of the batteries. Do not mix used and new cells.
 - Do not mix battery chemistries. The manufacturer recommends industrial 1.5V alkaline D-cells.
11. Examine, clean, and if necessary, lubricate the O-rings on the end flange.
 12. Examine and clean the surface on the inside of the battery compartment where the O-rings sit.
 13. Replace the desiccant packs.








The old ones can be used again, but the manufacturer recommends that the user install new packs.

14. Put the battery plate into position and tighten the two nuts equally until the battery plate is flush with the white connector.
15. Connect the battery connector. Make sure that it "locks" in the receptacle.
16. Install the end flange. Make sure that the wiring is not pinched.
17. Use a 5/32" hex wrench to install the three 10-31 x 3/8" screws again.
18. Tighten the boss plug screw.



19. Connect the sensor to the software and turn on the internal batteries.
The voltages in the sensor *Dashboard* for new batteries are 12V for the Main Battery Voltage and 6V for the Isolated Circuit Voltage. If they are not, open the sensor and correct the problem.

8.4 Install batteries

⚠ WARNING	
	Explosion hazard. If the batteries are not installed correctly, explosive gases can be released. Make sure that the batteries are of the same approved chemical type and are inserted in the correct orientation.
⚠ WARNING	
	If the user thinks that a sensor has water in the pressure housing: Disconnect the sensor from any power supply. Put on safety glasses and make sure that the sensor is pointed away from the body and other people. In a well ventilated area, use the purge port (if the sensor is so equipped), or very SLOWLY loosen the bulkhead connector to let the pressure release.
⚠ WARNING	
	If the user thinks that the batteries have leaks, pressure may have built up inside of the pressure housing. Follow ESD protocols to release internal pressure. Put on safety glasses and protective gloves and make sure that the sensor is pointed away from the body and other people. In a well ventilated area, very SLOWLY loosen the bulkhead connector to release the pressure. Keep away from heat, sparks, flame, and other sources of ignition. Do not smoke.
⚠ CAUTION	
 	<p>The pressure housing contains Electrostatic Discharge (ESD) sensitive parts and assemblies that are susceptible to damage from ESD. Follow ESD protocols:</p> <ul style="list-style-type: none"> • Put on protective eye wear before you open the pressure housing. • Any electrostatic charge on the body of the human operator must be released before the pressure housing is opened: put a hand on a grounded surface, or better, wear a grounded antistatic wrist strap. • At a minimum, wear short-sleeved antistatic clothing, such as cotton, or better, wear an antistatic smock for this service activity. <i>Do not wear a sweater, fleece or polyester-based clothing.</i> • At a minimum, use a workstation with a wood or metal tabletop, or better, a tabletop that dissipates static. <i>Do not use a workstation with a synthetic or polymeric-based tabletop.</i>

The manufacturer ships the 12 lithium batteries for the sensor separately. Do the steps below to install or replace the batteries. Also see the "how to" video on the manufacturer's website to do this procedure.



	
Do not ship assembled battery packs	Lithium batteries are packaged in heat-sealed plastic and bubble-wrap.

Table 4 Recommended lithium battery brands

SAFT LS-14500 (included)	3.6 V, 2.6 Ah
Tadiran TL-4903	3.6 V, 2.4 Ah
Electrochem BCX85 series	3.9 V, 2.0 Ah


1. Make sure that the end flange and pressure housing are dry.
2. Use a 9/64" hex key to remove the two screws on the sides of the pressure housing.
3. Install these two screws into the sides of the end flange to start to loosen the end flange.



4. Turn the end flange counter-clockwise to loosen it from the pressure housing.
5. Pull gently to disconnect the battery wires in the end flange from the battery pack.
6. Use a lint-free tissue to remove any water from the O-ring surfaces inside the pressure housing and end flange.
7. Use a 7/64" hex key to loosen the captured screw in the battery cover plate.
8. Remove the battery pack from the pressure housing.
9. Turn the yellow cover plate counterclockwise to remove it from the battery pack body.
10. Move each of the two O-rings on the outside of the battery holder from the grooves. It makes it easier to remove or insert batteries.



11. If necessary, remove the size AA batteries in the pack.
12. Insert new batteries.
Make sure to alternate the positive (+) and the negative (-) ends on the size AA batteries to agree with the labels on the pack as they are installed.
13. Move the O-rings back into the grooves.
14. Align the pin on the yellow battery cover with the post hole in the battery pack assembly.

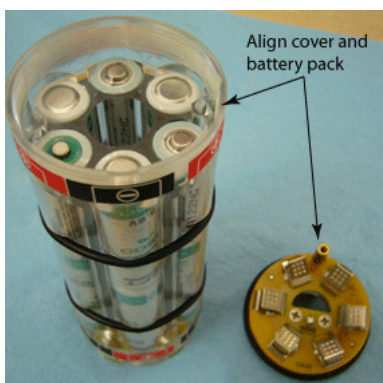

15. Align the "D"-shaped part of the battery pack with the pins on the shaft.
16. Slowly move the assembly onto the housing. Push gently to connect the battery assembly with the circuit board in the pressure housing.
17. Use a 7/64" hex key to tighten the captured screw on the yellow battery cover onto the shaft in the pressure housing.
18. Attach the Molex connector on the end flange to the connector in the pressure housing.



19. Examine the O-rings on the end flange. They must be pristine, with no lint or scratches or chips.
 - Apply a small quantity of Parker Super O Lube® to any new O-rings.
20. Align the end flange holes with the holes in the pressure housing.
21. Carefully push the end flange into the pressure housing.
It may help to rotate the end flange so that the wires do not bend too much.
22. If necessary, use a 9/64" hex key to remove the two screws from the end flange.
23. Use a 9/64" hex key to install the two screws into the pressure housing of the sensor again.

8.5 Remove or replace conductivity cell devices

⚠ CAUTION



AF24173 anti-fouling devices contain bis(tributyltin) oxide. Wear rubber or latex gloves and eye protection to replace these devices on the sensor if it is so equipped. Wash hands with soap and water when finished.

Read the precautions on the product label.

It is a violation of US federal law to use this product in a manner that is inconsistent with its label.

Sensors equipped with conductivity cells have a subassembly with a holder for either an anti-fouling device or a blank device. Make sure to remove the device to thoroughly flush the conductivity cell. Install the device again after the cell is clean so that the conductivity cell operates correctly. (The steps below are from the SBE-37 MicroCAT.)

Table 5 Conductivity cell devices

	
AF24173 anti-fouling device	Blank device

1. If necessary, remove the yellow protective plugs.
2. Remove the two screws that connect each device cup to the conductivity cell guard.



3. Remove the four Phillips screws that attach the conductivity cell guard to the pressure housing and carefully remove the cell guard.



4. Remove the protective plug from the device holder.
5. Use a 5/8-inch socket wrench to unscrew the device cap from the device cup.



6. Remove the AF24173 or the blank device from the cup.
7. Use a toothpick to lift each of the devices out of the holder. If necessary, use needle-nose pliers to carefully break up the AF24173 device.

Option	Procedure
To deploy sensor	Insert new devices into the holders, then install the cap onto the cup. Do not tighten too tight. Attach the copper assembly to the sensor again.
To clean or store sensor	Do not install new anti-fouling devices. Do install the blank device. Install the protective plug. Make sure to remove the plug before the next deployment or pressurization of the sensor. Damage to the conductivity cells can be caused if the plugs are not removed.

8. Attach the conductivity cell guard again.

8.6 Clean flow path

⚠ WARNING

Bleach is caustic. Wear nitrile gloves and safety glasses and work in a well ventilated area to use bleach. Wash hands after use.

⚠ CAUTION

Do not mix bleach with water > 1 PSU salinity or let bleach into a sensor that has not been flushed with clean, fresh (< 1 PSU) water.


The manufacturer recommends that the user thoroughly clean the flow path before and after a deployment to make sure that the sensor continues to collect accurate, high-quality data. Correct maintenance of the flow path is critical for the multi-parameter measurement capabilities.

1. Remove the pH sensor (if so-equipped) and store it in the white plastic holder with KCl solution or de-ionized (DI) water if non-ionic surfactant or bleach is necessary to clean the flow path. The pH sensor can stay installed on the sensor if DI water is used.
2. Do not expose the pH sensor to air for longer than a few minutes. Refer to "Prepare pH sensor for storage" for details to remove the pH sensor.
3. If necessary, remove the copper assembly and anti-fouling or blank devices from the sensor.
4. Use a 3/16-inch hex wrench to remove the flushing port plug, a ¼-20 x 1 inch socket head screw.

Supplies:

- 500 ml bottle of DI water
- Container for waste water
- Container for sensor
- De-ionized or distilled water. If unavailable, use fresh tap water. Do not use shipboard fresh water because it can have traces of oil in it.
- Non-ionic surfactant. The manufacturer supplies this with each sensor. It is a secondary alcohol ethoxylate, a non-ionic detergent that is biodegradable. Make sure that any alternative detergent that is used is scientific grade, with no colors, perfumes, glycerins, lotions, etc.
- Bleach mixed 50:1—Household bleach is usually 4–7% (40,000–70,000 ppm) sodium hypochlorite with stabilizers.
- Part number 50087, the manufacturer-supplied kit to clean the plumbing.

Part number	Description
30384	Tygon tube, 7/16 inch ID, 1/16 inch wall
30385	Tygon tube, ¼ inch ID, 3/8 inch OD, 1/16 inch wall
30521	60 cc syringe
311244	Female Luer thread to ¼ inch ID tubing barb
311249	Nylon reducer union, ½ to ¼ inch

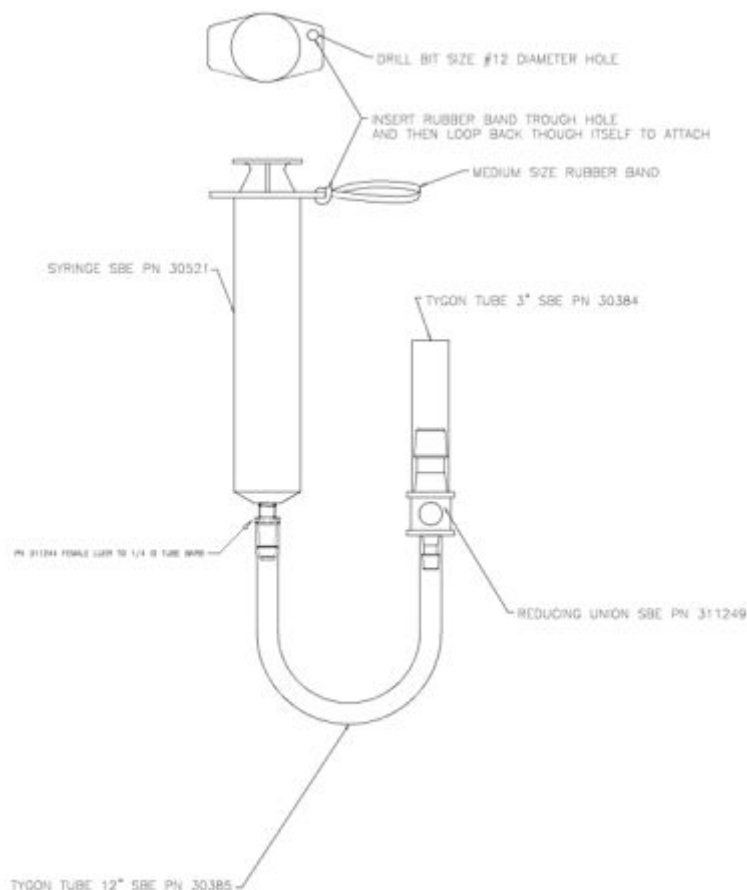

Procedure notes:

Use warm, 40 °C water and 1% non-ionic surfactant to flush the flow path for one minute.

It may be necessary to do these steps up to five times to clean the flow path.

If there is bio-fouling on the sensor it may be necessary to fill the flow path with the non-ionic surfactant solution for approximately 12 hours to loosen debris.

Make sure to remove the blank or anti-fouling device if necessary.

Keep the plug to install again.

5. Put the instrument in a container with the bulkhead connector face-up.
6. If a cleaning solution is necessary, pull approximately 30 ml into the syringe.
7. Attach the syringe to the tubing, PN 30385.
8. Push the syringe plunger to fill the sensor flow path until 3–5 cm of solution shows in each tube.
9. Push and pull the plunger to mix the solution in the flow path. Do this 2–3 times.
10. Drain the solution from the sensor into a waste container. Push the syringe plunger to help remove all of the solution from the sensor.
11. Remove the tubing and shake the sensor.
12. If the flow path is still not clean, do the above steps again with the bleach solution.
13. Flush the flow path with DI water.
14. Install the flushing port plug again.
15. Install either the blank or AF24173 device again.
The sensor is ready for a functional test in the laboratory or a deployment.

8.7 Examine O-rings

NOTICE

Do not use petroleum-based lubricants on O-rings. It will cause damage to the O-rings. Damaged O-rings can cause the sensor to flood and make it unserviceable.

Examine the O-rings on the sensor every time they are exposed—on the connector end flange and other parts. O-rings must be pristine. If there is any question about whether an O-ring is clean and undamaged, replace it with a new one.

1. Dry the O-rings and O-ring grooves with a lint-free cloth or tissue.
2. Examine each O-ring to make sure there is no damage, dirt, lint or hair on it.
3. Replace an O-ring if necessary.
4. Apply a small quantity of silicone-based Parker Super O Lube® or Dow Corning® high vacuum grease to each O-ring.
 - The lubricant helps the O-ring move into its groove with no twist, which can compromise the seal.
 - Do NOT use petroleum-based lubricants on any O-ring.

8.8 Clean bulkhead connectors

NOTICE

Do not use WD-40® or petroleum-based lubricant on bulkhead connectors. It will cause damage to the rubber.


Damaged connectors can cause a loss of data and additional costs for service.

Damaged connectors can cause damage to the sensor and make it unserviceable.

Use silicone-based lubricants only.

Examine, clean, and lubricate bulkhead connectors at regular intervals. Connectors that are not lubricated increase the damage to the rubber that seals the connector contacts. The incorrect lubricant will cause the failure of the bulkhead connector.

1. Apply isopropyl alcohol (IPA) as a spray or with a nylon brush or lint-free swab or wipes to clean the contacts.
2. Flush with additional IPA.
3. Shake the socket ends and wipe the pins of the connectors to remove the IPA.
4. Blow air into the sockets and on the pins to make sure they are dry.
5. Use a flashlight and a magnifying glass to look for:

Any corrosion.		
Cracks, scratches, or other damage on the rubber pins or in the sockets.		

Separation of the rubber from the pins.	
Swelled or bulging rubber pins.	

6. Use a silicone-based lubricant on each of the contacts of the bulkhead connector. The manufacturer recommends any of the products listed below.
 - 3M™ Spray Silicone Lubricant (3M ID# 62-4678-4930-3). Make sure to let it dry.
 - Dow Corning Molykote® III Compound (DC III)
 - Dow Corning High Vacuum Grease® (DC 976 V)
 - Dow Corning 4 Electrical Insulating Compound® (DC 4)
 - Dow Corning Molykote 44 High Temperature Grease® (DC 44)

Use a finger to put a small quantity of 100% silicone grease or spray in the sockets or on the pins. Use the mating plug or cable to help distribute the lubricant. Do not use too much lubricant, as that will prevent a good seal.

7. Connect the connectors.
8. Use a lint-free wipe to clean any unwanted lubricant from the sides of the connectors.

8.9 Prepare sensor for storage

8.9.1 Store CTD

When the plumbing is clean, the sensor can be prepared for storage:

- Make sure the anti-fouling devices are not installed.
- Make sure there is a dummy plug and lock collar attached to the bulkhead connector.

For short-term storage up to a week, make sure to put the manufacturer-supplied colored plugs on the intake and exhaust plumbing ports.

For long term storage:

- Attach one end of a Tygon hose section to the exhaust port, and the other end to the intake port to isolate the conductivity cell plumbing.
- Attach the yellow protective label over the intake and exhaust ports.



8.9.2 pH sensor storage

Long-term storage

Make sure that the sensor and the electrode are clean and completely dry before storage. Dry electrodes reduce the chances that biofouling will occur on the storage cap. The sensor can be put in storage with or without the DD-size batteries installed.

Note that the conditioning of the electrodes only occurs when the sensor is wet. The electrodes must have power supplied to maintain their bias.

The manufacturer recommends that the user fill the storage cap with seawater and make sure the DD-size batteries are installed two to three days before a deployment. This lets the sensor bias and condition so that it is ready to collect data correctly from the start. If it is not exposed to seawater in the storage cap two to three days before deployment, the electrode will become conditioned within the first few days of a deployment.

Short-term storage

Fill the storage cap with seawater and make sure DD-size batteries are installed. This will keep the bias and conditioning of the electrode. Make sure that new batteries are installed before the next deployment.

8.10 Calibration

The manufacturer calibrates every sensor to known conditions and measures the response of the sensor. Calibration coefficients are calculated and are used to get engineering units.

8.10.1 Conductivity

The conductivity sensor has a fixed resistor in parallel with the cell. When the cell is dry and in air, the output of the sensor is a frequency that is a reflection of the fixed resistor. This value is on the Calibration Certificate and should remain stable (within 1 Hz) over time.

The calibration changes as a result of fouling in the cell by chemical or biological deposits. Because of this, the long-term accuracy depends on how clean the cell is. The manufacturer recommends that the user has the conductivity sensor calibrated before and after a deployment, but also after the sensor has been deployed in contaminated water.

8.10.2 Temperature

As the thermistor element ages during the first year, the calibration of temperature sensor changes by a few thousandths of a degree. Change is less in subsequent years. Environmental conditions do not have much effect on the calibration.

8.10.3 Pressure

The strain-gauge pressure sensor has an initial static error band of 0.05%. Pressure sensors show most of their error as a linear offset from zero. Note that the pressure sensor is an "absolute" sensor, so the raw data includes the effect of atmospheric pressure of 14.7 psi. Engineering units, however, are relative to the ocean surface. The sensor uses the equations below to convert psia:

$$P(\text{db}) = P(\text{psi}) = P(\text{psia}) - 14.7$$

$$P(\text{dbar}) = [P(\text{psia}) - 14.7] \times 0.689476$$

The manufacturer recommends that the user applies the offset calibration coefficient to make small corrections to the pressure sensor calibration. Compare the pressure values to a barometer.

1. Let the sensor equilibrate in a constant temperature bath for at least 5 hours in the orientation in which it will be deployed.
2. Start the software.
3. Set the pressure offset to 0.0 (POffset=0).
4. Set the output format to converted decimal (OutputFormat=1).
5. Set the pressure output to yes (OutputPress=y), and pressure units to decibars (SetPressUnits=0).
6. Take 100 samples and transmit data (TSN:100).
7. Compare the sensor output to what a barometer at the same elevation as the pressure sensor port shows.

- Calculate the offset: the barometer value - pressure sensor value.
8. Set the calculated offset (POffset=).

8.10.4 Optical Dissolved Oxygen

The primary cause for a change in calibration in the optional ODO sensors is bio-fouling of the optical window from chemical or biological contamination. The manufacturer recommends that the user cleans the optical window at regular intervals and sends the ODO for calibration when it has been contaminated by oil or biological material.

The secondary cause of ODO calibration change is photobleaching of the sensor film. If the ODO sensor is disconnected from the main sensor body, make sure to keep the sensor film out of direct sunlight. Every measurement puts short wavelength light on the film that degrades the film over time. The manufacturer recommends that the user send the ODO for calibration when the memory in the main sensor is full, approximately 300,000–500,000 samples.

8.10.5 Manufacturer pH calibration

NOTICE

The manufacturer recommends that the user return the sensor annually for calibration to make sure it gives the highest level of accuracy for both pH calculation and re-processed data. The external reference electrode is replaced as needed.

Calibration coefficients are stored in the sensor and are used with an on-board temperature measurement and the user-selectable salinity constant to calculate pH from the cell voltage potentials. The calculated pH value shows in each data frame sent from the sensor.

Calibration coefficients are written to the header section of every raw .sbsdat data file that uploaded from the sensor. The software uses these coefficients to re-process data.

8.10.6 Verify calibration

NOTICE

Do not use NIST-type buffers with the sensor to check accuracy. The chemistry of those buffers is not appropriate for marine pH measurements and can damage the external reference electrode.

The manufacturer recommends that the user monitor the accuracy of the calibration at regular intervals. Compare the calculated pH values with independent pH data that is collected just before and after a deployment, either in situ or from direct measurements of a primary standard under temperature-controlled conditions.

One procedure for pre- and post-deployment checks is to use a sample of natural seawater, preferably from the deployment location, and spectrophotometry. The sensors require 20–40 psu.

1. Fill the flow cell with the sample seawater. Make sure there are no bubbles on the face of the ISFET chip. Close the opening and update the stored salinity value with the sample salinity value: in the software, go to **Sensor**, *SeaFET*, *SeaFET Settings*, then *Processing* to enter the updated sample salinity value.
2. Make sure the sensor and a bottle of the additional sample is at a constant temperature in a bath (e.g. overnight).
3. Flush the flow cell with the sample seawater and then fill the flow cell. Return the sensor to the bath. Record data until the values are stable and similar to the expected values. Once the seawater has been measured, flush the flow cell again with sample seawater.
 - For deployment within 1–2 weeks, fill the cell completely with the sample seawater, then close.

- For deployment after 2 or more weeks, the manufacturer recommends that the sensor be stored dry and then reconditioned with natural seawater, preferably from the deployment site, 3–5 days before it is deployed.

Section 9 Reference

9.1 Terminal program setup and use

If necessary, use a terminal program to set up and operate the sensor.

1. Use the test cable to connect the sensor to the PC and a 12V power supply.
2. Start a terminal emulator program such as HyperTerminal® or Tera Term.
3. Select "Serial" for the type of connection.
4. Set up the connection at 19200 (default), 8 bits, no parity, 1 stop bit, flow control: none.

9.2 Terminal commands

This is a reference for advanced users. The values of these commands are stored in the sensor until the user changes them. Notes about terminal commands are listed below.

- Commands are not case-sensitive.
- Use "Enter" to store a command.
- The sensor sends an error message if a command is invalid.
- The argument Y and 1 are both "Yes" and N and 0 are both "No." For example, OutputSal=y and OutputSal=1 are equivalent.
- If there is no communication with the sensor for 2 minutes, it goes into a low power mode. Use "Enter" to start communication again.
- Push the "Esc" key, then "Enter" to stop the sensor as it sends data.
- If the user sent StartNow (autonomous mode) and the sensor is in operation or in standby, the user can use the Status commands, TS, TPS, SL, QS, and Stop. For example, if the user sends a DS to see status data, the sensor completes the current measurement and then responds to the command. If OutputExecuted=Y, the sensor will send "executing" messages until the measurement is complete.
- If the user sent StartLater (autonomous mode) and the sensor is in operation or in standby, the user can use the Status commands, TS, TPS, SL, QS, and Stop. To send other commands, enter the Stop command, then enter any other commands, and send StartLater again.

Status

GetCD	show configuration
GetSD	show status
GetCC	show calibration coefficients
GetEC	show event counter
ResetEC	reset event counter
GetHD	show hardware
Help	shows list of available commands
DS	show status and configuration
DC	show calibration coefficients

General setup

DateTime=x	set clock. Format is mmddyyhhmmss
BaudRate=x	RS232 rates. Default is 19200. 600*, 1200*, 2400*, 4800, 9600, 19200, 38400, 57600, 115200. *available only if no oxygen sensor is installed.

Reference

OutputExecutedTag=x	x=Y: show XML executing and executed tags. x=N: do not show
TxRealTime=x	x=Y: send real-time data during autonomous operation or in serial line sync mode. x=N: do not send
QS	puts sensor in low power ("quiescent") state. Sensor continues to take measurements and store data.
OutputFormat=x	x=0: send raw decimal data. x=1: send converted decimal data.
Initlogging	resets the memory pointer to sample number 0. Makes all memory available for storage. Send command twice to confirm.
*Default	reset user settings back to the defaults as shipped from the manufacturer
SampleInterval=x	x=interval in seconds between samples (6–21600) when command is sent with StartNow or StartLater.

Data collection

StartNow	start data collection now
StartLater	start data collection at a specified time in the future
StartDateTime=	mmddyyhhmmss is format for delayed data collection start time
Stop	stop data collection, or wait to start data collection if StartLater was sent
SL	sends as output the last sample stored in the buffer
TS	take sample, store data in buffer, send data, leave power on
TPS	operate pump, collect data once, send data in the current specified format
TSS	take sample, store in buffer and in flash memory, send as output. Valid only if usepump=Y or in SeapHOx™ mode.
TPSS	operate pump, collect a sample, store in buffer and in flash memory, send as output. Valid only if usepump=Y or in SeapHOx™ mode.
Getsamples:b,e	upload converted data, where b=start sample number, and e=end sample number. Total must be less than 5000.
Recoversamples	restore the stored sample number. Use to restore the sample number after the "initlogging" command is sent but before any new data is collected.
ReferenceSalinity=x	sets the salinity value in psu that is used in calculations

Pump setup

MinCondFreq=x	minimum conductivity frequency for pump to operate, Hz
PreFlush=x	time, in seconds, for pump to operate before the first measurement. Default is 300. Range 300–600. If autonomous operation starts with StartNow, the pre-flush starts immediately. If autonomous operation starts with StartLater, the pre-flush starts x seconds before scheduled start time.
PreFlushStartTime=x	set mmddyyhhmmss for controlled ("polled") data collection set 0 to disable the pre-flush for controlled data collection
OxNTau=x	pump operation time multiplier. Default is 7.0. Range 0–100.0.
PumpTime=x	time the pump operates for each measurement. Range 0–550.
PumpOn	start pump. Pump will stop after 2 minutes without communication or when PumpOff is sent.
PumpOff	stop pump, if started with PumpOn.

SeaFET™ V2 calibration coefficients

phcaldate=	sensor sends command to DO sensor and gets response
K0=	set K0 coefficient
K2=	set K2 coefficient
ReferenceSalinity=	set the salinity value to be used in calculations

SeapHOx™ V2-specific

Resync	re-sync host SeaFET™ to SBE-37-SMP-ODO. Communicates with the 37 to configure the CTD and download coefficients and serial numbers from the attached SBE-37-SMP-ODO.
Send37=x	x = command for SBE37
Ctdpower=	configures the SeapHOx™ V2 to provide power to the attached SBE37. Power can come from internal batteries or external source. x=0: do not power the SBE37. x=1: power the SBE37.
Setoxunits=x	x=0: show oxygen units in ml/L. x=1: show oxygen units in mg/L
Usectdt=	use CTD temperature value for calculations

Section 10 Software reference

10.1 Sensor dashboards

The Dashboard is the main area from which to control and communicate with the sensor. Information about the status of the sensor is contained in the upper part of the window and is updated each time the sensor is connected to the software. To see the dashboard, select it from the **View | Dashboards** menu item.

Common settings

- **Connect-Disconnect** lets the user disconnect the sensor after it is set up for operation.
- **Start-Stop** lets the user start and stop data collection.
- **Sensor Settings** lets the user select options for a specific deployment.
- **Deployment Wizard** lets the user select a deployment mode, start time, the parameters to measure, estimate the deployment time and data collection interval, and make a summary report of the status of the sensor.
- **Transmit Data** lets the user move data saved on the sensor to a PC.
- **Show Saved Data** lets the user see data that was saved on a PC in a graph.
- **Command Terminal** lets the user send terminal program-level commands to the sensor.


10.2 UCI menu

The user can set up the way that the software saves information about the operation of the sensor and change the way that the data looks from the *Preferences* menu.

10.2.1 General tab

Enter or change the directory on the PC in which data from the sensor is stored.


- "Maximum Wakeup Attempts" lets the user select the number of times the software will try to connect to a sensor. Range: 5–15.
- "Response Timeout" is the interval of time between communication between the sensor and the software. Range: 5–10.
- "Default Data Directory" lets the user enter the location on the PC in which to save data from the sensor. If there is a check in the "Prompt at startup" box, the user can change the directory in which the data is stored every time the software starts.

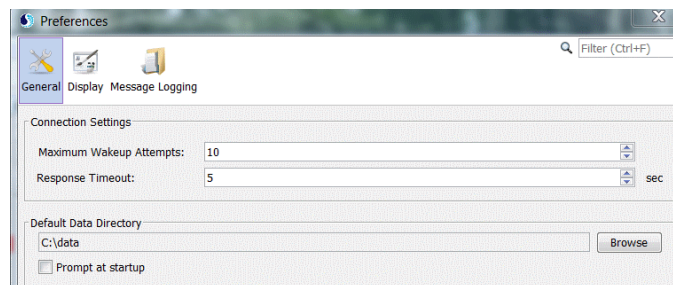

10.2.2 Display tab

Note: The software operates faster if the user selects less data and only one or two graphs.

Data that is collected by the sensor shows in the user-selected graphs in the Performance Optimization Settings area of the *Display* tab.

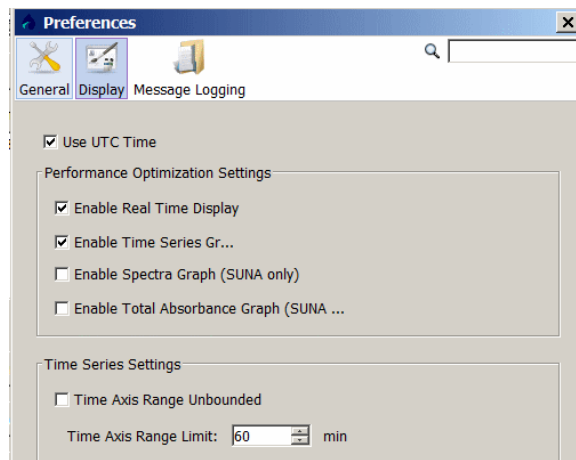

- "Enable Real Time Display"—Put a check in this box to see the data as it is collected in either the software, or if deployed, a terminal program.
- "Enable Time Series Graph"—Put a check in this box to see user-selected data. Remove the check in the box to so that the graph is disabled and the data does not show.
- SUNA only: "Enable Spectra Graph"—Put a check in this box to see both dark and light data in raw counts. Refer to [Monitor spectra](#) for details.
- SUNA only: "Enable Total Absorbance Graph"—Put a check in this box to see the calculated absorbance. Refer to [Monitor absorbance](#) for details.

Time Series Settings—The default is a check in the box for continuous data collection that is not limited to a specified amount of time. Remove the check in the box to enable the "Time Axis Range Limit" of 60 minutes (default value). Only the most recent hour of data will show in the *Time Series Graph*. The user-selectable range is 1–1440 minutes.

10.2.3 Message tab

The software automatically saves files that have information about sensor use, data collection, and software operation over time. This information helps the user and Customer Support find problems and troubleshoot.

When the "Display Dialog for Error Level Messages" box has a check in it, the software saves one of five levels of error messages.

- **INFO**—The default level. All high-level operations are saved.
- **ERROR**—Minimum level. Only errors that need to be examined by the user or Customer Support are saved.
- **WARN**—Low level. The files that are saved do not have enough information for the user to make an analysis of how the sensor is used and set up.
- **DEBUG**—High level. Used to troubleshoot. **DEBUG** and **TRACE** files are very large.
- **TRACE**—The highest level. Used only to troubleshoot.

"Daily Files"—all messages from a single day are saved in one file.

"Rolling Files"—all messages are saved in one file until it is the maximum size specified by the user. The messages are then saved to a new file. The user specifies the number of files to keep. The oldest files are erased first.

"Save Lost Bytes"—if this box has a check in it, the software saves all of the unexpected output from the sensor to a file.

"File Location"—the operating system of the PC determines where these files are saved.

10.3 Sensor menu

The **Sensor** menus have options for each sensor with which the software communicates. Refer to the sections on [Sensor dashboards](#) on page 49 for more information about these items.

Advanced Sensor menu items

Common

- *Erase Data* lets the user erase all of the data stored in the sensor.
- *Summary Report* lets the user get a summary of the settings stored in the sensor.
- *Set Clock* lets the user synchronize the time between the PC and the sensor.
- *Collect Diagnostics* is helpful for troubleshooting.

10.3.1 SeaFET, SeapHOx

- *Erase Saved Data* lets the user erase all of the data saved in the sensor.
- *Edit Data File Headers* lets the user put labels on data files.
- *Upgrade Firmware* lets the user install the latest firmware from the manufacturer.

10.4 Data menu

The **Data** menu has sensor-specific options to look at data that has been saved to a PC.

Section 11 General information

Revised editions of this user manual are on the manufacturer's website.

11.1 Warranty

Refer to the manufacturer's website for warranty information (seabird.com/warranty).

11.2 Service and support

The manufacturer recommends that sensors be sent back to the manufacturer annually to be cleaned, calibrated, and for standard maintenance.

Refer to the website for FAQs and technical notes, or contact the manufacturer for support at support@seabird.com. Do the steps below to send a sensor back to the manufacturer.

1. Complete the online Return Merchandise Authorization (RMA) form or contact the manufacturer.
Note: *The manufacturer is not responsible for damage to the sensor during return shipment.*
2. Remove all batteries from the sensor, if so equipped.
3. Remove all anti-fouling treatments and devices.
Note: *The manufacturer will not accept sensors that have been treated with anti-fouling compounds for service or repair. This includes AF 24173 devices, tri-butyltin, marine anti-fouling paint, ablative coatings, etc.*
4. Use the sensor's original ruggedized shipping case to send the sensor back to the manufacturer.
5. Write the RMA number on the outside of the shipping case and on the packing list.
6. Use 3rd-day air to ship the sensor back to the manufacturer. Do not use ground shipping.
7. The manufacturer will supply all replacement parts and labor and pay to send the sensor back to the user via 3rd-day air shipping.

11.3 AF24173 anti-foulant device

AF24173 Anti-Foulant Devices supplied for user replacement are supplied in polyethylene bags displaying the following label:

AF24173 ANTI-FOULANT DEVICE	
FOR USE ONLY WITH SEA-BIRD ELECTRONICS' CONDUCTIVITY SENSORS TO CONTROL THE GROWTH OF AQUATIC ORGANISMS WITHIN ELECTRONIC CONDUCTIVITY SENSORS.	
ACTIVE INGREDIENT: Bis(tributyltin) oxide	52.1%
OTHER INGREDIENTS:	47.9%
TOTAL	100.0%
DANGER Refer to conductivity sensor manual for the complete label and additional precautionary statements and information on the handling, storage and disposal of these devices.	
Net contents: Two anti-foulant devices Sea-Bird Electronics, Inc. 13431 NE 20 th St. Bellevue, WA 98005	EPA Registration No. 74489-1 EPA Establishment No. 74489-WA-1

AF24173 ANTI-FOULANT DEVICE

FOR USE ONLY WITH SEA-BIRD ELECTRONICS CONDUCTIVITY SENSORS TO CONTROL THE GROWTH OF AQUATIC ORGANISMS WITHIN ELECTRONIC CONDUCTIVITY SENSORS.

ACTIVE INGREDIENT: Bis(tributyltin) oxide 52.1%
OTHER INGREDIENTS: 47.9%
TOTAL 100.0%

DANGER

See Precautionary Statements for additional information.

General information

FIRST AID	
If in eyes	<ul style="list-style-type: none">• Hold the eye open and rinse slowly and gently with water for 15–20 minutes.• Remove contact lenses, if present, after the first 5 minutes, then continue rinsing eye.• Call a poison control center or doctor for treatment advice.
If on skin or clothing	<ul style="list-style-type: none">• Take off contaminated clothing.• Rinse skin immediately with plenty of water for 15–20 minutes.• Call a poison control center or doctor for treatment advice.
If swallowed	<ul style="list-style-type: none">• Call poison control center or doctor immediately for treatment advice.• Have person drink several glasses of water.• Do not induce vomiting.• Do not give anything by mouth to an unconscious person.
HOT LINE NUMBER	
Note to Physician	Probable mucosal damage may contraindicate the use of gastric lavage.
Have the product container or label with you when calling a poison control center or doctor, or going for treatment. For further information, call National Pesticide Telecommunications Network (NPTN) at 1-800-858-7378.	

Net contents: Two anti-foulant devices

Sea-Bird Electronics, Inc.

13431 NE 20th St.

Bellevue, WA 98005

EPA Registration No. 74489-1

EPA Establishment No. 74489-WA-1

PRECAUTIONARY STATEMENTS

HAZARD TO HUMANS AND DOMESTIC ANIMALS

Danger:

Corrosive—Causes irreversible eye damage and skin burns. May be fatal if swallowed or absorbed through the skin. Do not get in eyes, on skin, or on clothing. Wash thoroughly with soap and water after handling and before eating, drinking, chewing gum, using tobacco, or using the toilet. Remove and wash contaminated clothing before reuse.

PERSONAL PROTECTIVE EQUIPMENT

Users must wear: protective gloves (rubber or latex), goggles or other eye protection, long-sleeved shirt, long pants, and shoes plus socks.

USER SAFETY RECOMMENDATIONS

Users should:

- Remove clothing immediately if pesticide gets inside. Then wash thoroughly and put on clean clothing.
- Follow the manufacturer's instructions for cleaning and maintaining PPE. If no such instructions for washables, use detergent and hot water. Keep and wash PPE separately from other laundry.

ENVIRONMENTAL HAZARDS

Do not discharge effluent containing this product into lakes, streams, ponds, estuaries, oceans, or other waters unless in accordance with the requirements of a National Pollutant Discharge Elimination System (NPDES) permit and the permitting authority has been notified in writing prior to discharge. Do not discharge effluent containing this product to sewer systems without previously notifying the local sewage treatment plant authority. For guidance contact your State Water Board or Regional Office of EPA. This material is toxic to fish. Do not contaminate water when cleaning equipment or disposing of equipment washwaters.

PHYSICAL OR CHEMICAL HAZARDS

Do not use or store near heat or open flame. Avoid contact with acids and oxidizers.

DIRECTIONS FOR USE

It is a violation of Federal Law to use this product in a manner inconsistent with its labeling.

For use only in Sea-Bird Electronics conductivity sensors. Read installation instructions in the applicable Conductivity Instrument Manual.

Intended for professional use by military, government, academic, commercial, and scientific personnel.

STORAGE AND DISPOSAL

PESTICIDE STORAGE: Store in original container in a cool, dry place. Prevent exposure to heat or flame. Do not store near acids or oxidizers. Keep container tightly closed.

PESTICIDE SPILL PROCEDURE: In case of a spill, absorb spills with absorbent material. Put saturated absorbent material into a labeled container for treatment or disposal.

PESTICIDE DISPOSAL: Pesticide that cannot be used according to label instructions must be disposed of according to Federal or approved State procedures under Subtitle C of the Resource Conservation and Recovery Act.

CONTAINER HANDLING: Nonrefillable container. Do not reuse this container for any other purpose. Offer for recycling, if available.

Sea-Bird Electronics
13431 NE 20th Street
Bellevue WA 98005 U.S.A.
(425) 643-9866

