

SBE 52-MP

Moored Profiler CTD & optional DO Sensor

The SBE 52-MP CTD sensor is intended for use as a modular component on moored profiling platforms in which a device travels vertically beneath a buoy or a buoyant package is winched up and down from a bottom-mounted platform. It is an easy-to-use, light, and compact instrument, well suited to even the smallest vehicle. The 52-MP can be equipped with an SBE 43F Dissolved Oxygen sensor, but does not support other auxiliary sensors. It is externally powered, and temporarily stores data in memory (if power is removed, data in memory is lost).

The SBE 52-MP's pump-controlled, TC-ducted flow minimizes salinity spiking, and its 1 Hz sampling provides good resolution of oceanographic structures and gradients on typical slow-moving packages (20-50 cm/sec). Data are output in real-time in engineering units (mmho/cm, °C, decibars, ml/l) or raw hex or binary.



Shown with optional SBE 43F Dissolved Oxygen Sensor

Features

- Conductivity, Temperature, Pressure, and (optional) Oxygen at 1 Hz (1 sample/second) or polled sample acquisition.
 - For 1 Hz sampling, SBE 52-MP stores data in memory and can also transmit in real-time. On command (typically at the end of each profile), data is uploaded to the moored profiler.
- Integral pump.
- RS-232 or logic-level (0-3.3 V) interface, small memory, no batteries — for use on vehicles that can supply power and acquire data.
- Unique flow path, pumping regimen, and expendable anti-foulant devices, for maximum bio-fouling protection.
- Pump-controlled, T-C ducted flow to minimize salinity spiking.
- 3/8-16 locator/mounting hole, to assist in mounting to a McLane MMP moored profiler.
- Depths to 600 or 7000 m.
- Seasoft® V2 Windows software package (setup and data display).
- Five-year limited warranty.

Components

- Unique internal-field conductivity cell permits use of expendable anti-foulant devices, for long-term bio-fouling protection.
- Aged and pressure-protected thermistor has a long history of exceptional accuracy and stability.
- Pressure sensor with temperature compensation is available in eight strain-gauge ranges (to 7000 m).
- (optional) Oxygen sensor is field-proven, individually calibrated SBE 43F Dissolved Oxygen sensor.
- For 1 Hz sampling, pump runs continuously, providing bio-fouling protection and correlation of CTD (and optional DO) measurements. For polled sampling, Adaptive Pump Control provides high-accuracy oxygen data.

Options

- Plastic (600 m) or titanium (7000 m) housing.
- SBE 43F Dissolved Oxygen Sensor (frequency-output version of our SBE 43).
- RS-232 or logic level (0 - 3.3 V) interface.
- XSG/AG or wet-pluggable MCBH connectors.

Measurement Range

Conductivity	0 to 9 S/m (0 to 90 mmho/cm)
Temperature	-5 to 35 °C
Pressure	0 to 20 / 100 / 350 / 600 / 1000 / 2000 / 3500 / 7000 m
Dissolved Oxygen (optional)	120% of surface saturation (all natural waters, fresh & salt)

Initial Accuracy

Conductivity	± 0.0003 S/m (± 0.003 mmho/cm)
Temperature	± 0.002 °C
Pressure	± 0.1% of full scale range
Dissolved Oxygen (optional)	± 2% of saturation

Typical Stability

Conductivity	0.0003 S/m per month (0.003 mmho/cm per month)
Temperature	0.0002 °C per month
Pressure	± 0.05% of full scale range per year
Dissolved Oxygen (optional)	0.5% per 1000 hours (clean membrane)

Resolution

Conductivity	0.00005 S/m (0.0005 mmho/cm) (most oceanic waters; 0.4 ppm in salinity)
Temperature	0.001 °C
Pressure	0.002% of full scale range
Dissolved Oxygen (optional)	0.035% of saturation (0.003 ml/l at 0 °C & 35 PSU)

Sampling Rate

1 Hz (1 sample/sec)

External Power Requirements

Input power: 3 Watts at 7-16 VDC (consult factory for voltage outside this range)
 Turn-on transient: 300 mA at 10V
 Sampling (includes pump): 62 mA at 10V



Memory

Static RAM stores up to 28,000 samples of C, T, P, & DO (*if power removed, data in memory is lost*)

Housing, Depth Rating, & Weight

Plastic, 600 m, in air 3.2 kg, in water 1.5 kg
 3AL-2.5V Titanium, 7000 m, in air 5.3 kg, in water 3.7 kg

DO sensor cable not shown for clarity.

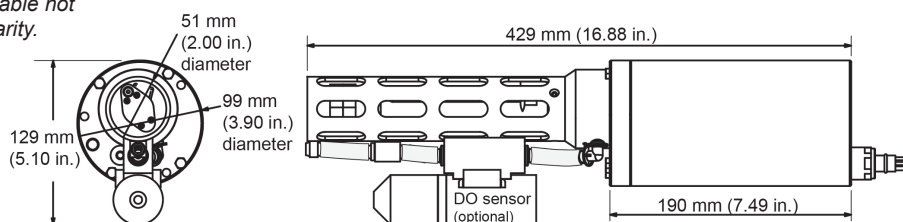

SBE 52-MP
on
McLane
Moored
Profiler

Specifications subject to change without notice. ©2015 Sea-Bird Scientific. All rights reserved. Rev. December 2015