

SeapHOx™ V2 Ocean CT(D)-pH-DO Sensor

The Sea-Bird Scientific SeapHOx™ V2 combines the Satlantic SeaFET™ V2 pH sensor with the Sea-Bird Electronics SBE 37-SMP-ODO MicroCAT CTD+DO sensor. The SeapHOx™ V2 allows for the integrated data collection of pH with the critical oceanographic and biological measurements of temperature, salinity, and oxygen. The integrated package also allows the SeaFET™ V2 to take advantage of the SBE 37's pumped flow path and anti-fouling technology, extending deployment durations in some cases.

Features

- Moored pH, Conductivity, Temperature, Pressure (optional), and Optical Dissolved Oxygen, at user-programmable 6-second to 6-hour intervals.
- Integral pump.
- RS-232 interface.
- Internal memory and batteries (can be powered externally).*
- Expendable anti-foulant devices, unique flow path, and pumping regimen for bio-fouling protection.
- UCI software package (setup, data upload, and data processing).
- Field-proven MicroCAT family, with more than 10,000 instruments deployed.
- Maximum depth 50 m.

* The instrument MUST carry internal batteries; external power may extend the deployment duration depending on the sampling regime.




Components

- The pH sensor is Ion selective field effect transistor type.
- Unique internal-field conductivity cell permits use of expendable anti-foulant devices, for long-term bio-fouling protection.
- Aged and pressure-protected thermistor has a long history of exceptional accuracy and stability.
- Optional strain-gauge pressure sensor with temperature compensation is available in two ranges.
- Oxygen sensor is field-proven, individually calibrated SBE 63 Optical Dissolved Oxygen sensor.
- Pump runs for each sample, providing improved pH, conductivity, and oxygen response, bio-fouling protection, and correlation of CTD and oxygen measurements.

Options

- RS-232 Interface
- Optional strain-gauge pressure sensor
- Wire mounting clamp and guide or brackets for mounting to a flat surface

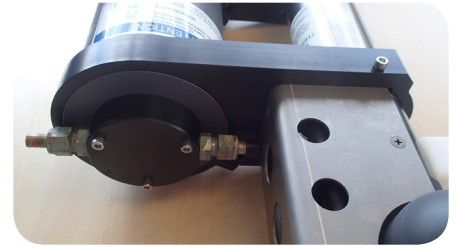


SeaFET connected to MicroCAT pumped flow path exhaust port

Measurement Range

Conductivity	0 to 7 S/m (0 to 70 mS/cm)
Temperature	-5 to 45 °C
Optional Pressure	20 m or 100 m measurement range
Dissolved Oxygen	120% of surface saturation in all natural waters (fresh and salt)
pH	6.5 - 9.0 pH

Initial Accuracy

Conductivity	± 0.0003 S/m (0.003 mS/cm)
Temperature	± 0.002 °C (-5 to to 35 °C); ± 0.01 °C (35 °C to 45 °C)
Optional Pressure	± 0.1% of full scale range
Dissolved Oxygen	larger of ± 3 µmol/kg (0.07 ml/L, 0.1 mg/L) or ± 2%
pH	± 0.05 pH

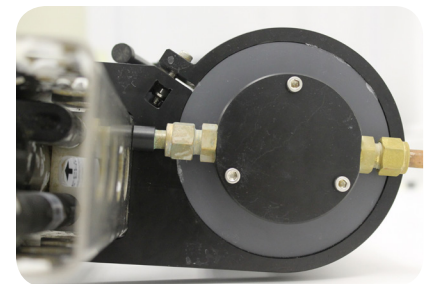

Typical Stability

Conductivity	0.0003 S/m (0.003 mS/cm) per month
Temperature	0.0002 °C per month
Optional Pressure	0.05% of full scale range per year
Dissolved Oxygen	sample-based drift < 1 µmol/kg/100,000 samples (20 °C)
pH	0.003 pH/month

Resolution

Conductivity	0.00001 S/m (0.0001 mS/cm)
Temperature	0.0001 °C
Optional Pressure	0.002% of full scale range
Dissolved Oxygen	0.2 µmol/kg
pH	0.004 pH

Memory Capacity	32 MB (Over 1,240,000 samples)
System Depth Rating	50 m
System Dimensions	74.17 cm x 28.25 cm x 12.90 cm 29.2" x 11.12" x 5.08"
Supply Voltage Range	6 to 18 VDC