


DATE	SYM	REVISION RECORD	AUTH.	DR.	CK.

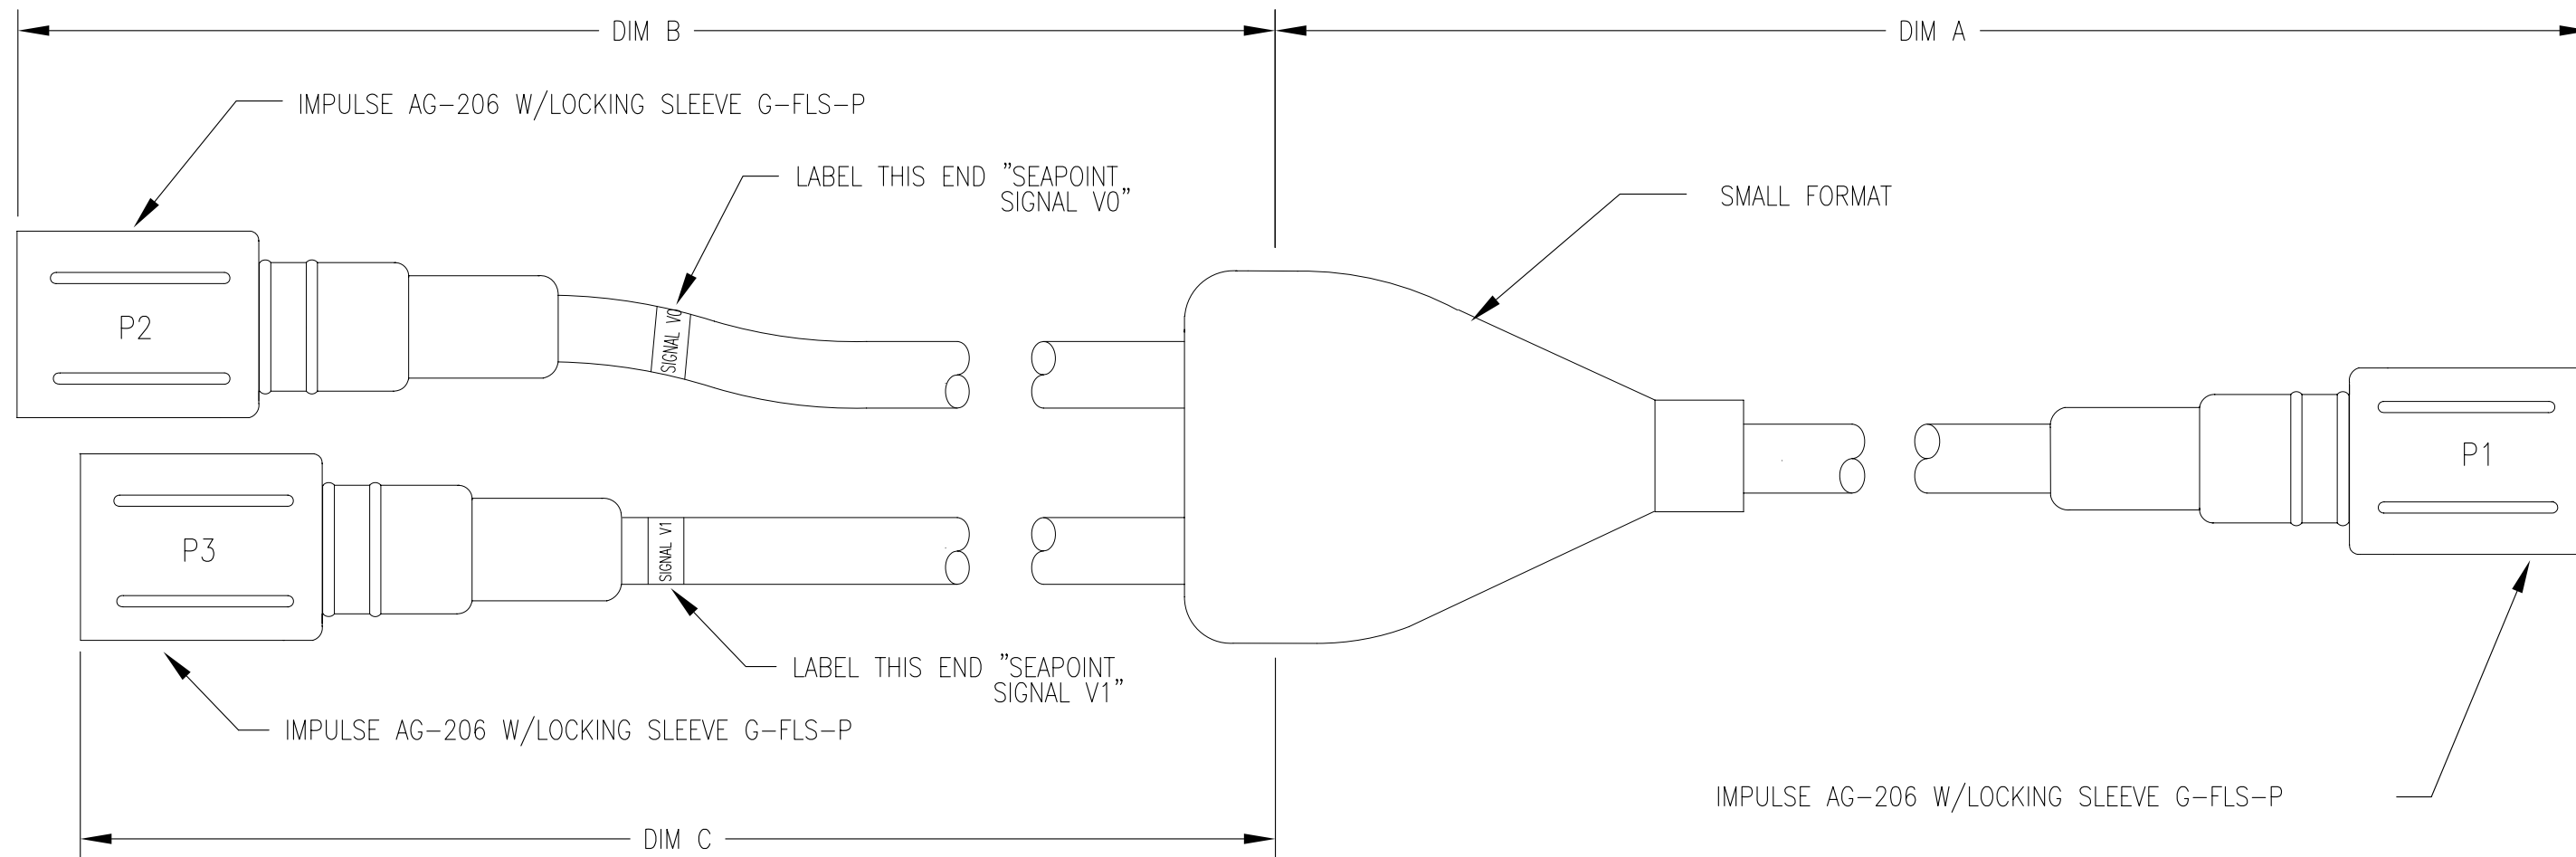

SEAPOINT SIGNAL V0	GAIN	RANGE
TURBIDITY METER	5X	500 FTU
FLUOROMETER	3X	50 µg/l
CDOM (SUVF)	3X	500 µg/l

SEAPOINT SIGNAL V1	GAIN	RANGE
TURBIDITY METER	1X	<750 FTU
FLUOROMETER	1X	150 µg/l
CDOM (SUVF)	1X	1500 µg/l

P1 AG206	P2 AG206	P3 AG206	FUNCTION
PIN 1	PIN 1,5	PIN 1,5,6	POWER COMMON
PIN 2	PIN 2		SEAPOINT SIGNAL V0
PIN 3	PIN 3		SEAPOINT COMMON V0
PIN 4		PIN 2	SEAPOINT SIGNAL V1
PIN 5		PIN 3	SEAPOINT COMMON V1
PIN 6	PIN 4	PIN 4	POWER (+)

SBE P/N	DIM A	DIM B	DIM C
172631	20 IN	26 IN	26 IN

TOLERANCES	SEA-BIRD ELECTRONICS, INC			
FRACTIONAL	P/N SEE TABLE	SCALE NTS	DRAWN BY PL	
DECIMAL	APPROVED BY CB			
ANGULAR	DATE 05.07.10	DRAWING NUMBER	33509	REV _
TITLE Y-CABLE: DUAL SEAPOINT SENSORS				